

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

35.G1250 Div. I

First Named Inventor or Application Identifier

HIROSHI SUGITANI, ET AL.

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patent
Box Patent Application
Washington, DC 20231

1. ☐ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification Total Pages
3. ☒ Drawing(s) (35 USC 113) Total Sheets
4. ☒ Oath or Declaration Total Pages
- a. ☐ Newly executed (original or copy)
- b. ☐ Unexecuted for information purposes
- c. ☒ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
- i. ☐ **DELETION OF INVENTOR(S)**
Signed Statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).
5. ☒ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of the
oath or declaration is supplied under Box 4c, is considered as being
part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☒ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure ☐ Copies of IDS
Statement (IDS)/PTO-1449 Citations
12. ☒ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity ☐ Statement filed in prior application
Statement(s) Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☒ Divisional ☐ Continuation-in-part (CIP) of prior application No. 08/281,006

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

05514
(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	11-20 =	-	X \$ 18.00 =	\$ -
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	3-3 =	-	X \$ 78.00 =	\$ -
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$ -
				BASIC FEE (37 CFR 1.16(a))	\$760.00
	Total of above Calculations =				\$760.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				-
	TOTAL =				\$760.00

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$ 760.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	David L. Schaeffer, RN 32,716
SIGNATURE	David L. Schaeffer
DATE	July 23, 1999

TITLE OF THE INVENTION

INK JET HEAD, INK JET APPARATUS, AND METHOD OF AND
APPARATUS FOR MANUFACTURING THE HEAD

5

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to an ink jet head and
an ink jet head apparatus having the ink jet head.

10 Furthermore, the present invention relates to a method of
and an apparatus for manufacturing the ink jet head, and
more particularly, to the alignment in manufacture of
energy generating elements employed for discharge in the
head.

15 Description of the Related Art

Figs. 1 and 2 show an example of a conventional ink
jet head. Fig. 1 is a longitudinal cross-sectional view
partially showing a surface of a head which is cut
horizontally along a discharge port row. Fig. 2 is a
20 cross-section taken along the line 2-2' of Fig. 1.

As shown in Fig. 1, a plurality of discharge ports
1101 are provided in a conventional ink jet head. An
electro-thermal transducer for generating thermal energy
utilized to discharge a liquid (hereinafter referred to as
25 an ink) from the discharge port 1101 is provided for every
ink flow passage 1108. Each of the electro-thermal

transducers 1103 is mainly constituted by a heating resistor 1102 and electrode interconnections 1110 for supplying power to the heating resistor 1102.

More specifically, as shown in Fig. 2, an insulator film 1111 and an interlayer film 1112 are formed on a substrate 103 made of, for example, silicon, and a heating resistor layer 1102 having a pattern such as that shown in Fig. 1 is formed on these films. Patterned electrode interconnections 1110 made of, for example, Al are formed on a portion of the heating resistor layer 1102. The portion of the heating resistor layer 1102 on which no electrode interconnections are formed constitutes a heating portion 1116.

Furthermore, a first protective film 1113 and a second protective film 1114 are coated on the patterned heating resistor layer 1102 and the electrode interconnection 1110. A heater board 104 (see Fig. 2) is constituted by the substrate 103, the electro-thermal transducers formed on the substrate 103 and so on.

Referring to Fig. 1, the ink flow passages 1108 are partitioned by flow passage walls 1109. The end portions of the ink flow passages 1108 remote from the discharge ports 1101 communicate with a common liquid chamber 1106. The common liquid chamber 1106 stores the ink supplied from an ink tank (not shown). The ink supplied from the common

liquid chamber 1106 is introduced to each of the ink flow passages 1108 where it is retained by virtue of the meniscus formed near the discharge port 1101. At that time, if the electro-thermal transducer 1103 is selectively
5 driven, film boiling occurs in the ink as a result of the thermal energy generated by the electro-thermal transducer 1103, generating a bubble and in turn, ejecting ink. The ink is discharged from the discharge port 1101 by virtue of the growth of the bubble.

10 A ceiling plate 105 made of, for example, a resin is joined onto the heater board 104 of the ink jet head.

More specifically, the ceiling plate 105 is a unit in which an orifice plate 1104 having the discharge ports 1101 formed therein is integrally formed with the flow passage
15 walls 1109. The ceiling plate 105 is joined to the heater board 104 in the manner described below: as shown in Fig. 2, the ceiling plate 105 is placed while aligning the discharge port forming portion of the ceiling plate 105 relative to the electro-thermal transducers on the heater
20 board 104 by means of, for example, the image processing, and a rear portion of the ceiling plate 105 (remote from the discharge port forming portion) is then temporarily fixed by, for example, an adhesive. Thereafter, the flow passage walls are pressed by an elastic member (not shown),
25 such as a plate spring, from above, whereby the adjacent

electro-thermal transducers 1103 on the heater board 104 are separated from each other by the flow passage walls 1109 in such a manner that a single electro-thermal transducer 1103 is disposed in every ink flow passage 1108.

- 5 However, in the conventional heater board structure described above, since the lower end of the flow passage wall 1109 of the ceiling plate 105 is brought into contact with a flow passage wall joining surface 1115 forming a convex portion on the heater board 104, if a small gap is
- 10 created between the flow passage wall 1109 and the joining surface 1115, the ink pressure waves generated by bubbling may propagate to the adjoining ink flow passages, transferring the bubbling energy to the adjacent ink flow passages. This makes ink discharge unstable.
- 15 Particularly, this becomes a serious problem in a case where the electro-thermal transducers 1103 and the flow passage walls 1109 are provided close to each other as a consequence of an increase in the resolution of the ink jet head.
- 20 Further, in the above structure in which the heater board 104 and the ceiling plate 105 are closely attached to each other by means of the elastic member, such as a plate spring, without using an adhesive, the direction in which the fixing force is applied may vary or the positioning
- 25 accuracy may deteriorate, thus generating a positional
-

deviation between the ceiling plate 105 and the heater board 103. In that case, in the above-described structure in which the flow passage walls 1109 are brought into contact with the convex portions on the heater board 104, even if the above gap is very small, a portion of the flow passage wall 1109 may rise above the convex portion or the flow passage wall 1109 may rise on the electro-thermal transducer 1103. In these cases, unstable bubbling, transfer of the bubbling energy into the adjacent ink flow passages or crosstalk may occur, making the dot diameter non-uniform or degrading the recording quality.

SUMMARY OF THE INVENTION

In view of the aforementioned problems, an object of the present invention is to provide an ink jet head and an ink jet apparatus which avoid or at least reduce the loss of discharge energy which would otherwise escape to adjacent ink flow passages, ensuring excellent discharge.

To achieve the above object, the present inventors studied intensively and found an improved ink jet head and an improved ink jet apparatus.

The present invention provides an ink jet head including a substrate having a plurality of energy generating elements for generating energy utilized to discharge ink provided thereon, the substrate having a

recessed portion, and a wall member joined to the substrate, this wall member having plural flow passage walls which partially define plural flow passages. The energy generated by the energy generating elements acts
5 through the flow passages so as to act on the ink to discharge the ink, the flow passages being fully-defined when the substrate is joined to the wall member. The recessed portion of the substrate is provided between the adjoining energy generating elements. and this recessed
10 portion has a bottom surface located at a position which is lower than a position of a heat acting surface of the substrate along which heat is transmitted to the ink, the flow passage walls of the wall member abutting the substrate at the bottom surfaces.

15 Another aspect of the present invention relates to an ink jet apparatus which includes an ink jet head having a substrate having plural energy generating elements for generating energy utilized to discharge ink provided thereon, the substrate having a recessed portion and a wall
20 member joined to the substrate, the wall member having plural flow passage walls which partially define plural flow passages. The energy generated by the energy generating elements acts through the flow passages so as to act on the ink to discharge the ink, the flow passages
25 being defined when the substrate engages the wall member,

and a driving signal generation means generates signals for driving the energy generating elements of the ink jet head. The recessed portion has a bottom surface located at a position which is lower than the position of a heat acting
5 surface of the substrate along which heat is transmitted to the ink, and the flow passage walls of the wall member abut the substrate at the bottom surfaces.

In the present invention, since the wall member, such as an ink flow passage wall, of the ceiling plate is
10 brought into abutment with the bottom surface of the recessed portion provided in the substrate at a position which is lower than the heat acting surface and is not thus affected by the pressure wave generated in the ink by the energy generating element on the substrate, the pressure
15 wave does not reach the other flow passages through the recessed portion. Further, even if the wall member shifts from its contact position for any reason, it interferes with part of the recessed portion and does not rise above the shoulder of the recessed portion.

20 Consequently, a positional deviation of, for example, the ceiling plate can be reduced. Further, since discharge energy losses to the adjacent flow passages can be reduced, discharge can be performed in a state wherein there is substantially no crosstalk between the adjacent flow
25 passages, stabilizing discharge. As a result, excellent

recording results, such as a fixed dot size, can be obtained.

The present invention also relates to a method of manufacturing an ink jet head having a substrate having plural energy generating elements for generating energy utilized to discharge ink provided thereof, the substrate having a recessed portion, and a wall member joined to the substrate, the wall member having plural flow passage walls which partially define plural flow passages, the energy generated by the energy generating elements acting through these flow passages so as to act on the ink to discharge the ink. The flow passages are fully-defined when the substrate is joined to the wall member. This method involves providing recessed portion in the substrate, fitting those recessed portions to the flow passage walls of the wall member by applying a force to the wall member along a direction in which the energy generating elements are arranged, thereby aligning the flow passages with the energy generating elements.

Still another aspect of this invention is a method of manufacturing an ink jet head having a substrate having plural energy generating elements for generating energy utilized to discharge ink provided thereon, the substrate having a recessed portion, and a wall member joined to the substrate and having a plurality of flow passage walls

which partially define plural flow passages. The energy generated by the energy generating elements acts through the flow passages so as to act on the ink to discharge the ink. The flow passages are fully-defined when the

5 substrate and wall member are joined. This method involves providing plural recessed portions in the substrate, and fitting the recessed portions to the flow passage walls of the wall member by vibrating the substrate so that a force having at least a component acting in a direction in which

10 the energy generating elements are arranged is applied to the wall member. This serves to align the flow passages with the energy generating elements.

Furthermore, this invention concerns an apparatus for manufacturing an ink jet head having a substrate having

15 plural energy generating elements for generating energy utilized to discharge ink provided thereon, this substrate having a recessed portion, and a wall member joined to the substrate and having a plurality of flow passage walls which partially define plural flow passages. The energy

20 generated by the energy generating element acts through the flow passages so as to act on the ink to discharge the ink, and the recessed portion is fitted to each of the flow passage walls formed in the substrate so that the flow passages are defined when the flow passage walls engage the

25 recessed portions. This apparatus includes retaining means for retaining the substrate in which the recessed portions are provided, placing means for placing the wall member on the substrate retained by the retaining means so that the recessed portions oppose the flow passage walls, and

pressing means for pressing the wall member with a force having at least a force component in a direction in which the plurality of energy generating elements are arranged, the wall member having been placed by the placing means in
5 a state where it member is stacked on the substrate.
Vibration means vibrates the substrate so that the force component acts in the direction in which the energy generating elements are arranged.

In the present invention, even if accurate alignment
10 is not achieved when the ceiling plate is joined to the substrate, the flow passage walls of the ceiling plate enter the recessed portions provided in the substrate by causing a force in a direction in which the energy generating elements are arranged to act on the ceiling
15 plate. Consequently, the ink discharge ports can be brought into accurate alignment with the energy generating elements.

As a result, alignment can be readily performed using a simple structure, and cost and time required for
20 manufacturing ink jet heads can thus be reduced.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic plan view illustrating an example of a heater board structure of a conventional ink
25 jet head;

Fig. 2 is a cross-section taken along the line 2-2' of Fig. 1;

Fig. 3 is a schematic perspective view of an embodiment of an ink jet head according to the present
5 invention;

Fig. 4 is a cross-section taken along the line 3-3' of Fig. 3;

Fig. 5 is a cross-section taken along the line 5-5' of Fig. 3;

10 Fig. 6 is a cross-section taken along the line 6-6' of Fig. 5;

Fig. 7 is a perspective view of an ink jet cartridge in which the ink jet head shown in Fig. 3 is incorporated.

Fig. 8 is a perspective view illustrating the
15 structure of the ink jet cartridge shown in Fig. 7;

Fig. 9 illustrates a portion of an ink tank on which an ink jet unit is mounted in the ink jet cartridge shown in Fig. 7;

Fig. 10 illustrates a state in which the ink jet
20 cartridge shown in Fig. 7 is mounted on a carriage;

Fig. 11 is a schematic perspective view of an embodiment of an ink jet recording apparatus on which the ink jet cartridge shown in Fig. 7 is mounted;

Fig. 12 is a schematic plan view showing a heater
25 board according to a second embodiment of the present

invention;

Fig. 13 is a schematic perspective view illustrating an ink jet head manufacturing apparatus for manufacturing ink jet heads;

5 Figs. 14 (a) and 14 (b) are respectively cross-sectional views schematically illustrating two examples of a state in which a ceiling plate is placed on a substrate;

Fig. 14 (c) schematically shows the engagement of a spring with a top portion of the ceiling plate; and

10 Figs. 15 (a) and 15 (b) respectively illustrate the positional relation between a convex abutment pattern and a ceiling plate dummy nozzle wall in the ink jet head according to the present invention.

15 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Embodiments of the present invention will now be described with reference to the accompanying drawings.

Fig. 3 is a schematic perspective view of a first embodiment of an ink jet head according to the present invention. Fig. 4 is a cross-section taken along the line 3-3' of Fig. 3. Fig. 5 is a cross-section taken along the line 5-5' of Fig. 3. Fig. 6 is a cross-section taken along the line 6-6' of Fig. 5. Fig. 7 is a perspective view of an ink jet cartridge in which the ink jet head shown in 20 Fig. 3 is incorporated. Fig. 8 is an exploded perspective 25

view of the ink jet cartridge shown in Fig. 7. Fig. 9 illustrates a portion of the ink jet cartridge 11 shown in Fig. 7 on which an ink jet unit 13 of an ink tank 14 is mounted.

5 An ink jet cartridge 11 includes an ink jet head 12 in which the large number of discharge ports 1101 are formed, an ink jet unit 13 which contains the ink jet head 12 and in which electrical interconnections connected to the ink jet head 12 and ink conduits are formed, and an ink tank 14
10 serving as an ink accommodating portion for accommodating an ink. The ink jet cartridge 11 has an ink accommodating capacity larger than that of a conventional ink jet cartridge, and is located in such a manner that a distal end portion of the ink jet unit 13 protrudes slightly from
15 a front surface of the ink tank 14. As will be described later, the ink jet cartridge 11 is of a disposable type which is fixedly supported by a positioning mechanism and an electric contact portion provided on a carriage placed on an ink jet recording apparatus body in such a manner
20 that it can be mounted on and removed from the carriage (see Figs. 10 and 11).

First, the structure of the ink jet head 12 will be described with reference to Figs. 3 through 5. Identical reference numerals in these figures to those in Figs. 1 and
25 2 represent similar or identical elements.

As shown in Figs. 3 through 5, in the ink jet head 12, the electro-thermal transducers 1103 are disposed one for each ink flow passage 1108 as energy generating elements for generating energy utilized to discharge ink from the plurality of discharge ports 1101 arranged in a row. When supplied with a driving signal, an electro-thermal transducer 1103 generates thermal energy, whereby film boiling is generated in the ink, forming a bubble in the ink flow passage 1108. An ink droplet is discharged from the discharge port 1101 as a consequence of the growth of the bubble. The heating resistors 1102, constituting the electro-thermal transducers 1103 and made of a boride, such as hafnium, or a nitride, such as tantalum, are formed on the substrate 103 made of silicon. The heating resistors 1102 are formed integrally with the interconnections made of, for example, aluminum for supplying an electric signal to the respective heating resistors 1102 by the film forming technologies. An ink receiving port 107 for introducing the ink from the ink tank (not shown) into the common liquid chamber 1106 and the orifice plate 1104 having the plurality of discharge ports 1101 corresponding to the respective ink flow passages 1108 are integrally formed with the ceiling plate 105 in which the flow passage walls 1109 for separating the plurality of ink flow passages 1108 from each other and a groove for forming, for

example, the common liquid chamber 1106 for temporarily accommodating the ink supplied to the ink flow passages 1108 are formed. Polysulfone is preferably used as the material of the ceiling plate 105, the ink receiving port 5 107 and the orifice plate 1104. The ceiling plate 105 may also be made of other forming resin materials, such as polyether sulfone, polyphenylene oxide and polypropylene.

The heater board 104 of the ink jet head is constructed such that the portion thereof to be joined to 10 each of the flow passage walls 1109 of the ceiling plate 105 is recessed so that the flow passage wall can be fitted into that recessed portion, as will be described later.

The structure of the ink jet unit 13 will now be described with reference to Figs. 7 through 9.

15 As shown in Fig. 8, one end of a wire board 121 is interconnected to an interconnection portion of the heater board 103, while a plurality of pads 122 corresponding to the electro-thermal transducers 1103 (see Fig. 5) are provided on the other end portion of the wire board 121 to 20 receive an electric signal from the apparatus body, whereby an electric signal is supplied to the respective electro-thermal transducers 1103 from the apparatus body.

A flat metal supporting member 123 for supporting a rear surface of the wire board 121 serves as a bottom plate 25 of the ink jet unit 13. A pressing spring 126, having an

M-shaped form, presses the common liquid chamber (see Fig. 5) at the center of its M-shape, and linearly presses the portions of the ink flow passages 1108, preferably the area near the discharge ports 1101, by its front overhanging
5 portion 127. The heater board 104 and the ceiling plate 105 are gripped by leg portions of the pressing spring 126 which pass through holes 139 of the supporting member 123 and engage a rear surface thereof in a state wherein they are pressed to each other by the concentrated urging force
10 of the pressing spring 126 and of the front hanging portion 127 thereof. The supporting member 123 has holes 124, 134 and 136 which respectively engage two positioning projections 152 of the ink tank 14 and heat melt retaining projections 161 and 162 of the ink tank 14. The supporting
15 member 123 also has positioning projections 137 and 138 used for a carriage 16 on a rear surface thereof. The supporting member 123 also has a hole 125 through which an ink supply pipe 167 (described later) from the ink tank 14 can pass. The wire board 121 may be mounted on the
20 supporting member 123 by an adhesive.

Two recessed portions 171 of the supporting member 123 are provided near the protrusions 137 and 138, respectively, so that they can be located on extensions of the distal end areas of the head formed by parallel grooves
25 173 and 174 in the assembled ink jet cartridge 11 to

prevent unwanted material, such as dust or ink, from reaching the protrusions 137 and 138, as shown in Fig. 7. A lid member 151 on which the parallel grooves 173 are formed forms an outer wall of the ink jet cartridge, as shown in Fig. 7, as well as a space between the ink tank 14 and the lid member 151 in which the ink jet unit 13 can be accommodated. In an ink supply member 128 on which the parallel grooves 174 are formed, an ink conduit 158 connected to the ink supply pipe 167 is shaped in the form of a cantilever which is fixed at one end thereof located closer to the ink supply pipe 167. A sealing pin 130 is inserted into the ink supply member 128 to assure capillarity between the fixed side of the ink conduit 158 and the ink supply pipe 167. A packing 129 is provided to seal the gap between the ink tank 14 and the ink supply pipe 167. A filter 133 is provided at the end portion of the ink supply pipe 167 closer to the ink tank 14.

Since the ink supply member 128 is formed by molding, it is inexpensive, exhibits high positioning accuracy, and eliminates a reduction in the accuracy which would occur during manufacture. Further, since the ink conduit 158 has a cantilever structure, pressing of the ink conduit 158 against the ink receiving port 107 can be stabilized even when the ink supply member 128 is mass produced. The ink conduit 158 can be reliably connected to the ink receiving

port 107 only by supplying an adhesive from the side of the
ink supply member 128 in that pressed state. The ink is
then supply member 128 can be fixed to the supporting
member 123 by passing two pins (not shown) on the rear
5 surface of the ink supply member 128 through the holes 135
and 163 in the supporting member 123 and then by melting
the two pins in the holes. Since the melted small
protruding areas on the rear surface are accommodated in a
recess (not shown) on the side surface of the ink tank 14
10 on which the ink jet unit 13 is mounted, the positioning
surface of the ink jet unit 13 can be made accurate.

The structure of the ink tank 14 will be described
below.

The ink tank 14 includes a cartridge body 20, an ink
15 absorber 150 and a lid member 153. The ink tank 14 is
formed by inserting the ink absorber 150 into the cartridge
body 20 from the side thereof remote from the ink jet unit
13 and then by closing the cartridge body 20 by the lid
member 153.

20 The ink absorber 150 is made of a porous material
which absorbs and retains ink. The ink absorber 150 is
disposed within the cartridge body 20. The details of the
ink absorber 150 will be described later. An ink supply
port 154 is used not only to supply ink to the ink jet unit
25 13 but also to allow the ink absorber 150 to be impregnated

with ink during assembly of the ink jet cartridge 11. The ink tank 14 has an air port 156 through which the air is taken into the ink tank 14. A liquid repellent material 155 is disposed inside the air port 156 in order to prevent ink leakage from the air port 156.

In this embodiment, in order to assure excellent ink supply from the ink absorber 150, an air existing area in the ink tank 14 is formed by ribs 168 of the cartridge body 20 and partial ribs 169 and 170 of the lid member 153 over the corner which is furthest from the ink supply port 154 in such a manner that it is connected to the air port 156. Hence, the ink supply from the ink support port 154 to the ink absorber 150 is excellent and uniform. This method is practically useful. The cartridge body 20 has four ribs 168 on the rearward surface thereof parallel to the direction in which the carriage (see Fig. 11) is moved. The ribs 168 prevent the ink absorber 150 from making close contact with the rearward surface of the ink tank 14. The partial ribs 169 and 170 are provided on an inner surface of the lid member 153 in correspondence with the respective ribs 168 at positions corresponding to projected positions of the ribs 168. Unlike the ribs 168, the partial ribs 169 and 170 are separated from each other and so increase the air existing space more than the ribs 168. The partial ribs 169 and 170 are dispersed on a region which is less

than half the entire area of the lid member 153. The ribs enable the ink in the corner of the ink absorber 150 furthest from the ink supply port 154 to be stabilized and reliably introduced toward the ink supply port 154 due to
5 capillary action.

The ink tank 14 has an ink accommodating space of rectangular parallelepipedal shape, and the long side of the rectangular parallelepiped is located sideways. Therefore, the above-described rib layout is particularly
10 effective. Where the ink tank is located with its long side directed in the direction of the movement of the carriage 16 (see Fig. 11) or the ink tank has a square shape, ink supply from the ink absorber 150 can be stabilized by providing ribs on the entirety of the lid
15 member 153. In order to accommodate as much ink as possible in a limited space, it is desirable that the ink tank have a form of rectangular parallelepiped. In that case, it is essential to provide ribs which perform the above-mentioned action on the two surfaces adjacent to the
20 corner area in order to use the stored ink without waste, as mentioned above. Further, the ribs on the inner surface of the ink tank 14 are distributed uniformly in a direction of the thickness of the ink absorber 150 of rectangular parallelepipedal shape. This structure makes the
25 atmospheric pressure in the entire ink absorber 150 uniform

and thus enables the maximum amount of the ink in the ink absorber 150 to be consumed. Further, when an arc whose radius is equal to the long side of the rectangular parallelopiped is plotted on the upper surface thereof using, as a center thereof, the position to which the ink supply port 154 of the ink tank 14 is projected, by providing ribs on the surface outside of that arc, the portion of the ink absorber 150 located outside the arc can be placed under the atmospheric pressure at the earliest possible time. In that case, the air port 156 of the ink tank 14 can be located at any position as long as the air can be introduced into the area in which the ribs are disposed.

In addition, in this embodiment, the surface of the ink jet cartridge 11 located on the rear of the ink jet head 12 is made flat so as to minimize the space required in the apparatus to incorporate the ink jet cartridge 11 and to maximize the amount of ink stored in the ink jet cartridge 11. Consequently, the size of the apparatus can be reduced and the frequency with which the ink jet cartridge 11 must be replaced with a new one can be reduced. A protruding portion for the air port 156 is formed utilizing the rear portion of the space in which the ink jet unit 13 is provided, and that protruding portion is made hollow to form an atmospheric pressure supply space

157 over the entire thickness of the ink absorber 150. In this way, an improved ink jet cartridge which is not known can be provided. The atmospheric pressure supply space 157 has a size far greater than that of a conventional one, and
5 the air port 156 is located in the upper portion thereof. Thus, even if ink is released from the ink absorber 150 for some unknown reason, it remains in the atmospheric pressure supply space 157, until it is taken up into the absorber 150.

10 Fig. 9 illustrates the structure of the surface of the ink tank 14 on which the ink jet unit 13 (not shown) is mounted. Assuming that a straight line L_1 passes through substantially the center of the large number of discharge ports 1101 provided in the orifice plate 1104 parallel to
15 the bottom surface of the ink tank 14 or the reference surface of the carriage 16 on which the ink jet cartridge is mounted, the two positioning projections 152, which engage the holes 124 of the supporting member 123, are disposed on that straight line L_1 . The projections 152,
20 which are slightly shorter than the thickness of the supporting member 123, position the supporting member 123. A claw 165 which engages a 90° hooked surface 203 of a positioning hook 202 (see Fig. 10) of the carriage 16, is located on the extension of the straight line L_1 so as to
25 allow the force with which the ink jet cartridge is

positioned with respect to the carriage 16 to act on the surface area parallel to the above-mentioned reference surface containing the straight line L_1 . As will be described later, this structure is effective because the positioning accuracy of the ink tank 14 alone is the same as the positioning accuracy of the discharge ports 1101 of the ink jet head 12. Further, the projections 161 and 162 of the ink tank 14, which respectively correspond to the fixing holes 134 and 136 provided in the supporting member 123 are longer than the projections 152, and the protruding portions from the supporting member 123 are thermally melted to fix the supporting member 123. Further, a straight line L_3 , which is perpendicular to the straight line L_1 and passes the projection 161, does not coincide with a straight line L_2 which passes through the projection 162, and the projections 161 and 162 exist near the projection 152 located closer to the discharge ports 1101 of the ink jet head 12. Consequently, the positioning of the ink jet head 12 upon the ink tank 14 is further reinforced. A curve L_4 describes the outer wall position of the mounted ink supply member 128. Since the projections 161 and 162 are located along the curve L_4 , sufficient strength and positioning accuracy relative to the weight of the distal end side of the ink jet head 12 are assured. A tab 172 at the distal end of the ink tank

14 is inserted into a hole of a front plate 201 (Fig. 7) of the carriage 16. The tab 172 is provided to cope with an abnormality in which the ink tank 14 is displaced greatly. A stopper 166 is a protective member provided relative to a
5 bar (not shown) of the carriage 16. When the ink jet cartridge 11 is mounted, the stopper 166 below the bar maintains the mounted state of the ink jet cartridge 11 even when a force for removing the ink jet cartridge 11 in an upward direction acts thereon.

10 After the ink jet unit 13 is mounted on the ink tank 14, it is covered by the lid member 151. In that state, all the surfaces of the ink jet unit 13 are enclosed except for the underside thereof. Since the ink jet cartridge 11 is placed on the carriage 16, the open underside of the ink
15 jet unit 13 is located adjacent to the carriage 16, whereby all the four surfaces of the ink jet unit 13 are substantially enclosed. Thus, when the apparatus is continuously used for a long time, the heat from the ink jet head 12 located in that enclosed space causes a slight
20 temperature increase, which in fact may be helpful if it is desirable to keep the space warm. If too much heat is produced, then to accelerate natural heat radiation from the supporting member 123, a slit-like opening 159 is provided in the upper surface of the ink jet cartridge 11.
25 The opening 159 has a width smaller than that of the space

in which the ink jet head 12 is provided. In this way, a temperature increase is prevented, and a distribution of the temperature in the entire ink jet unit 13 can be made uniform regardless of the temperature of an external
5 environment.

In an assembled ink jet cartridge 11, ink in the cartridge body 20 passes through the ink supply pipe 167, the ink supply port 154, the hole 125 provided in the supporting plate 123, and then an introducing port provided
10 on the intermediate rear surface of the ink supply member 128 and is supplied into the ink supply member 128. After passing through the ink supply member 128, ink passes through the ink conduit 158 and the ink receiving port 107 of the ceiling plate 105 and flows into the common liquid
15 chamber 106.

A packing, made of, for example, silicon rubber or butyl rubber, is disposed at each of the connecting portions of the ink flow passage to seal the ink supply passage.

20 Since the ink supply member 128, the ceiling plate 105, the orifice plate 1104 and the cartridge body 20 are formed as one unit, as mentioned above, assembly accuracy is increased and the quality of the mass produced products can be improved. Further, the number of parts is reduced
25 as compared with that of the conventional apparatus.

Consequently, devices having the desired excellent characteristics can be reliably obtained.

Further, in the ink jet cartridge 11 of this embodiment, a gap 160 exists between an upper surface portion 131 of the ink supply member 128 and an end portion 210 of a room portion having the opening 159 of the ink tank 14. Similarly, a gap (not shown) is formed between a lower surface portion 132 of the ink supply member 128 and an end portion 213 of a thin plate member located below the ink tank 14 and closer to the ink jet head 12 and to which the lid member 151 is adhered. These gaps further accelerate the heat radiation effect of the opening 159, and prevent an unnecessary force applied to the ink tank 14 from being applied directly to ink supply member 128 and hence the ink jet unit 13.

The above-described structures of this embodiment are not known and are unconventional, and such structures have their advantages both individually and in combination.

Next, mounting of the ink jet cartridge 11 on the carriage 16 will be described with reference to Fig. 10.

Referring to Fig. 10, a platen roller 251 guides a recording medium 272 (which may be a sheet of recording paper) from the rear side of the figure to the front side thereof. The carriage 16 moves in the longitudinal direction of the platen roller 251, and has the front plate

201 (having a thickness of, for example, 2 mm) provided on the front of the carriage 16, i.e., on the side of the carriage 16 close to the platen roller 251 and located on the front side of the ink jet cartridge 11, a supporting plate 205 for an electric connecting portion, which will be described later, and the positioning hook 202 for fixing the ink jet cartridge 11 at a predetermined recording position. The front plate 201 has two positioning protruding surfaces 212 corresponding to the projections 137 and 138 of the supporting member 123 of the ink jet cartridge 11. After the ink jet cartridge 11 is mounted on the carriage 16, the carriage 16 is subjected to a perpendicular force directed to the protruding surfaces 212. Therefore, a plurality of reinforcing ribs (not shown) are provided on the side of the front plate 201 close to the front plate 201 against the direction of the application of the perpendicular force. The ribs slightly protrude from a front position L5 of the mounted ink jet cartridge 11 toward the platen roller 251 (by, for example, about 0.1 mm) and also form head protecting protruding portions. The supporting plate 205 has a plurality of reinforcing ribs 206 which extend in a direction perpendicular to the surface of the figure. The degree to which these ribs protrude sideways decreases in a direction moving toward the hook 202 from the platen roller 251 so as

to allow the ink jet cartridge 11 to be mounted slantingly,
as shown in Fig. 10. The supporting plate 205 also has a
flexible sheet 207 having pads 164 corresponding to the
pads 122 of the wire board 121 of the ink jet cartridge 11,
5 and a rubber pad sheet 209 for generating an elastic force
which presses against the pads 164 from the rear side of
the flexible sheet 207. In order to stabilize electrical
contact between the pads 122 and the pads 164, the
supporting plate 205 has a positioning surface 208 close to
10 the hook 202 in correspondence with the protruding surfaces
212 to exert the acting force toward the ink jet cartridge
11 in a direction opposite to the direction of the
protruding surfaces 212 to form a pad contact area between
the pads and to define the amount of deformation of the
15 pads of the rubber pad sheet 209 which faces the pads 164.
The positioning surface 208 is brought into contact with
the surface of the wire board 121 when the ink jet
cartridge 11 is fixed at a recordable position. Since the
pads 122 are distributed symmetrically with respect to the
20 straight line L_1 , the amount of deformation at which the
pads of the rubber pad sheet 209 are deformed becomes
uniform, further stabilizing the contact pressure between
the pads 164 and 122. In this embodiment, the pads 122 are
distributed in two rows in each of the upper and lower
25 portions and in two rows in the vertical direction.

The hook 202 has an elongated hole which engages a fixed shaft 211. To position the ink jet cartridge 11 relative to the carriage 16, the hook 202 is pivoted counterclockwise from the position shown in Fig. 10 and then moved leftward in the longitudinal direction of the platen roller 251 utilizing the space of the elongated hole. The hook 202 shifting method is not limited to the above-described one and any method can be adopted. However, a shifting method utilizing a lever is desirable.

When the hook 202 is pivoted, the ink jet cartridge 11 moves toward the platen roller 251 to a position where the positioning projections 137 and 138 can make contact with the protruding surfaces 212 of the front plate 201. As the hook 202 moves leftward, the 90° hooked surface 203 makes contact with a 90° surface of the claw 165 of the ink jet cartridge 11, the ink jet cartridge 11 turns about the contact area between the projections 137 and the protruding surfaces 212 on a horizontal plane, and finally the pads 122 and 164 make contact with each other. When the hook 202 has been retained at a predetermined position, i.e., at a fixed position, contact between the pads 122 and 164, complete contact between the projections 137 and 138 and the protruding surfaces 212, surface contact between the hooked surface 203 and the 90° surface of the claw 165, and surface contact between the wire board 121 and the

positioning surface 208 are completed simultaneously, thus completing retaining of the ink jet cartridge 11 relative to the carriage 16.

The ink jet apparatus to which the present invention
5 is applied will now be outlined.

The outline of the ink jet apparatus to which the present invention is applied is shown in Fig. 11. A lead screw 256 in which a helical groove 255 is formed is driven in two directions by a driving motor 264 through driving
10 force transmission gears 262 and 260. The carriage 16 is brought into engagement with the helical groove 255 by a pin (not shown) provided on a mounting portion 252 (see Fig. 10), and is slidably guided by a guiding rail 254 so that it can be reciprocatively moved in directions
15 indicated by arrows a and b in Fig. 11. A paper pressing plate 253 presses the recording medium 272 against the platen roller 251 in the direction in which the carriage 16 is moved. A photo coupler 258 and 259 constitutes home position detection means for checking the presence of the
20 lever 257 of the carriage 16 in that area when, for example, the direction in which the driving motor 264 is rotated is to be reversed. A capping member 270 for capping the front surface of the ink jet head 12 is supported by a supporting member 265. The capping member
25 270 has suction means 273 to perform suction recovery of

the ink jet head 12 through an in-cap opening 271. A supporting plate 268 is mounted on the apparatus body supporting plate 271, and a cleaning blade 266 is slidably supported by the supporting plate 268. The cleaning blade
5 266 is moved in forward and rearward directions by driving means which is not shown. The configuration of the cleaning blade 266 is not limited to the one shown but any known blade can be employed in this apparatus. A lever 263, used to initiate the suction recovery operation, moves
10 as a cam 29 which makes contact with the carriage 16 moves, whereby the driving force from the driving motor 264 is controlled by known transmission means, such as the gear 261 and clutch switch over.

The capping, cleaning and suction recovery processes
15 are performed at corresponding positions by the action of the lead screw 256 when the carriage 16 is at the home position region. Any known method can be employed in this embodiment as long as a desired operation can be performed at a known timing.

20 The major components of the present invention will be described.

The heater board of the ink jet head according to the first embodiment of the present invention will now be described with reference to Figs. 5 and 6.

25 After an insulating layer 1111 of an inorganic

material (e.g., SiO, SiO₂ or SiN) (in this embodiment, SiO₂) is formed on the substrate 103 by a known film forming technique (in this embodiment, sputtering is used), a portion of the insulating layer 1111 is removed in a form
5 shown in Fig. 6 by etching which employs a solvent of, for example, antimony fluoride to form a recessed shape 1117 to which the flow passage walls 1109 of the ceiling plate 105 are brought into contact. An end portion of the recessed shape 1117 is tapered in order to prevent deterioration of
10 a thin film formed on the shoulder portion of the insulating layer 1111. Thereafter, a first interconnection layer (not shown) of the two-layer interconnection is formed on the insulating layer 1111, and then an interlayer insulator 1112 (SiO₂), a resistor layer 1102 (HfB₂), an
15 interconnection layer 1110 (Al), a first protective layer 1113 (SiO₂), a second protective layer 1114 (Ta) and so on are formed, whereby the heater board is completed.

In this embodiment, a contact surface 1119 on the heater board to which the lower end portion of each of the
20 flow passage walls 1109 of the ceiling plate 105 is brought into contact is formed in the recessed region 1117. Therefore, where the aligned heater board and the ceiling plate 105 are brought into close contact and fixed to each other using an elastic member, such as a plate spring, the
25 flow passage wall 1109 does not shift out of position due

to the recessed portion 1117. Further, since the contact portion between the heater board and the flow passage wall 1109 is disposed lower than a heat acting surface 1116 which is a surface portion along which heat is supplied to the ink from the electro-thermal transducer 1103 (in this invention, the direction directed to the substrate 103 is expressed as low for convenience and does not indicate an actual downward direction), even if a small gap is generated between the contact surface 1119 of the heater board and the lower end portion of the flow passage wall 1109 of the ceiling plate, the pressure wave generated by bubbling does not readily propagate to the adjacent ink flow passage, thus greatly reducing bubbling energy loss.

Further, in a conventional head in which the substrate and the flow passage wall are not adhered together, when the temperature increases due to continuous discharge, the ceiling made of a resin expands relative to the substrate made of, for example, silicon due to a difference in the coefficient of thermal expansion between the ceiling plate and the substrate. Thus, where the initial alignment accuracy between the ceiling plate and the substrate is not good, the flow passage wall 1109 may shift on the heat acting surface of the heater board. However, in the present invention, even if expansion of the ceiling plate occurs, the edge of the flow passage wall 1109 strikes the

inclined surface of the recessed portion 1117, as shown in Fig. 6, and does not rise on the flow passage wall 1109.

The recessed region formed in this embodiment may be provided on the entire region where the flow passage wall is brought into contact with the substrate or near the heat acting portion above the heating resistor. In the latter case, the flow passage wall is fitted to that recessed portion.

Fig. 12 (A) is a plan view of the heater board according to a second embodiment of the present invention. Fig. 12 (B) is a cross-section taken along the line 12B-12B' of Fig. 12 (A). Reference numerals in these figures which are the same as those in Figs. 5 and 6 represent similar or identical elements, and description thereof is thus omitted.

In this embodiment, patterns of films are formed by the known film-forming and etching technologies in the same manner as that of the first embodiment. In this embodiment, since the two heating resistors 1102 are series-connected to each other in the single ink flow passage, the heater board can be formed without disposing the interconnection 1110 in the joining portion of the flow passage wall. Consequently, the recessed portion on the heater board can be formed deeper, and release of the bubbling energy to the adjacent ink flow passages can be

further restricted by making such a deep recessed portion the joining portion. As a result, stable discharge can be performed, and excellent recording at a fixed dot diameter can be performed.

5 Where the heater board (substrate) manufactured in the manner described above is joined to the ceiling plate, if the ceiling plate and the substrate are misaligned with each other, the positional relation between the energy generating element and the flow passage is misaligned, thus
10 reducing the ink discharge accuracy. To prevent this, it has been proposed to align the energy generating elements with the discharge ports by measuring the position of the energy generating elements on the substrate on an image obtained by, for example, a TV camera and then by measuring
15 the position of the ceiling plate mounted on a predetermined movable stage while moving the ceiling plate on an image.

 However, the above-described method requires measurement of the position of the energy generating
20 element and the position of the discharge ports, thus increasing the production costs of the manufacturing apparatus.

 Further, a sequence of operations, consisting of measurement of the position of the discharge ports, the
25 movement of the ceiling plate to a desired position and the

measurement of the position of the discharge ports again,
must be repeated until any deviation from the desired
position falls in a predetermined allowance. Thus, it
takes a relatively long time for positioning to be done,
5 thus relatively increasing production cost.

Hence, the present inventors intensively studied and
found both a method of and an apparatus for manufacturing
ink jet heads which enables alignment between a substrate
and a ceiling plate to be readily performed without
10 requiring a large-scale apparatus and without changing the
configuration of the ink jet head.

More specifically, the present invention provides a
method of manufacturing an ink jet head, including a
substrate on which a plurality of energy generating
15 elements for generating energy utilized to discharge ink
are provided, and a wall member joined to the substrate and
having a plurality of flow passage walls which can form
flow passages through each of which the energy generated by
the energy generating element is caused to act on the ink
20 to discharge the ink, the flow passages being formed by
joining the substrate to the wall member, the method being
characterized in that a recessed portion which is fitted to
each of the flow passage walls is provided in the
substrate, and in that the recessed portions are brought
25 into engagement with the flow passage walls by causing a

force to act on the wall member in a direction in which the plurality of energy generating elements are arranged to align the flow passages with the energy generating elements.

5 Further, the present invention provides a method of manufacturing an ink jet head including a substrate on which a plurality of energy generating elements for generating energy utilized to discharge ink are provided, and a wall member joined to the substrate and having a
10 plurality of flow passage walls which can form flow passages through each of which the energy generated by the energy generating element is caused to act on the ink to discharge the ink, the flow passages being formed by joining the substrate to the wall member. The method is
15 characterized in that a recessed portion which is fitted to each of the flow passage walls is provided in the substrate, and in that the recessed portions are brought into engagement with the flow passage walls by vibrating the substrate in a state where a force having at least a
20 component in a direction in which the plurality of energy generating elements are arranged acts on the wall member to align the flow passages with the energy generating elements.

 Further, an apparatus for manufacturing an ink jet
25 head including a substrate on which a plurality of energy

generating elements for generating energy utilized to discharge ink are provided, and a wall member joined to the substrate and having a plurality of flow passage walls which can form flow passages through each of which the

5 energy generated by the energy generating element is caused to act on the ink to discharge the ink, a recessed portion which is fitted to each of the flow passage walls being formed in the substrate, the flow passages being formed by bringing the flow passage walls into engagement with the

10 recessed portions, the apparatus comprising retaining means for retaining the substrate in which the recessed portions are provided, placing means for placing the wall member on the substrate retained by the retaining means in such a manner that the recessed portions oppose the flow passage

15 walls, pressing means for causing a force having at least a component in a direction in which the plurality of energy generating elements are arranged to act on the wall member placed by the placing means in a state wherein the wall member is stacked on the substrate, and vibration means for

20 vibrating the substrate in a state wherein the component in the direction of the arrangement by the pressing means is acting.

In the above-described structures, even if accurate alignment is not achieved when the ceiling plate is joined

25 to the substrate, the flow passage walls of the ceiling

plate enter the recessed portions provided in the substrate because of the force exerted in a direction in which the energy generating elements are arranged to act on the ceiling plate.

5 The method of and the apparatus for manufacturing ink jet heads will be described in further detail with reference to Fig. 13 to Fig. 15.

Fig. 13 illustrates an ink jet head manufacturing apparatus for manufacturing an ink jet head according to
10 the present invention.

In the figure, reference numeral 2010 denotes a base plate which is a structural material of the ink jet head. Onto this plate are joined, by means of an adhesive, a substrate 2011 on which a plurality of energy generating
15 elements (not shown) are provided and a circuit board 2013 for electrical wiring. The interconnections on the substrate 2011 and the wiring on the circuit board 2013 are electrically connected to each other by wire bonding 2014.

Reference numeral 2012 denotes a ceiling plate in
20 which an ink supply port, a common liquid chamber, grooves for forming ink flow passages and an orifice plate 2121 are formed as one unit by molding. Discharge ports 2120 are formed in the orifice plate 2121 using a laser.

The procedures of alignment between the ceiling plate
25 2012 and the substrate 2011 when the ink jet head having

the above-described structure is manufactured in the manufacturing apparatus will now be described.

First, the substrate 2011 on which the heat energy generating elements are provided as the energy generating
5 elements and the circuit board 2013 are adhered using an adhesive. Next, the substrate 2011 and the circuit board 2013 are electrically connected to each other by means of, for example, wire bonding to prepare the substrate of the ink jet head.

10 Thereafter, the base plate 2010 is placed on a receptor jig 2101 of the manufacturing apparatus. At that time, part of the front portion of the base plate 2010 (the portion on which the substrate 2011 is joined) is placed on a piezoelectric element 2105.

15 The base plate 2010 placed on the jig 2101 and the piezoelectric element 2105 is pressed in X and Y directions by a pressing mechanism (not shown) until part of the base plate 2101 makes abutment with pins 2102A, 2102B and 2102C on the jig 2101.

20 Next, the base plate 2010 is pressed in Z direction and fixed on the jig 2101 by a pressing mechanism which is not shown, whereby the front portion of the base plate 2010 is pressed against and fixed to the piezoelectric element 2105 while the rear portion thereof is pressed against and
25 fixed to the receptor jig 2101.

Thereafter, the ceiling plate 2012 is supplied onto the substrate 2011 on the base plate 2010. This supply is performed by making an automatic manipulator (not shown) retain the ceiling plate 2012 arranged on, for example, a tray (not shown) and by moving the retained ceiling plate 2012 onto the substrate 2011.

Subsequently, the upper portion of the ceiling plate 2012 (the top of the ink supply port in the case of this embodiment) is pressed by a spring 2103. At that time, the spring 2103 does not press the top of the ink supply port from above but presses the ink supply port in such a manner that it makes contact with the outer edge of a circumference formed by the top, as shown in Fig. 14 (c). In this way, the pressing force of the spring 2103 is divided into a force $F'1$ in a direction perpendicular to the substrate 2011 (Z direction) and a force $F'2$ in a direction in which the energy generating elements are arranged on the substrate 2011 (X direction).

Thereafter, the front surface of the orifice plate 2121 of the ceiling plate is pressed by two plate springs 2104 located in front of the ink jet head so that the orifice plate 2121 can be pressed against the front edge surface of the substrate 2011, whereby the ceiling plate 2012 is positioned relative to the substrate 2011 in the direction of discharge.

At that time, the discharge ports 2120 and the energy generating elements have either of following two types of positional relationships. That is, as shown in Fig. 14(a), walls 2012a, which form ink flow passages corresponding to the respective discharge ports 2120, may be on the acting surfaces (the heat acting surface) on energy generating elements 2011a or in recessed portions 2011d between the energy elements, as shown in Fig. 14 (b).

The state wherein the walls 2012a are in the recessed portions 2011d between the energy generating elements, as shown in Fig. 14(b), is a state in which the energy generating elements 2011a are in proper alignment with the discharge ports 2120. In other words, when the walls 2012a are disposed on the energy generating elements, as shown in Fig. 14(a), alignment is performed by shifting the ceiling plate 2012 in any way and thereby dropping the walls 2012a in the recessed portions 2011d between the energy generating elements, as shown in Fig. 14(b).

Hence, in this embodiment, the substrate 2011 is vibrated by applying a signal to the piezoelectric element 2105 with which the bottom surface of the front portion of the base plate 2010 is contact. The signal applied to the piezoelectric element is obtained by adding a bias voltage to a signal obtained by amplifying the signal (rectangular waves of about 5 KHz in this embodiment) generated by an

oscillator 2107 by an amplifier 2106. When applied with the signal, the piezoelectric element vibrates at an amplitude of about 1 μ m.

Although the component force F'2 is acting on the ceiling plate on the substrate 2011 in a direction (X direction) in which the energy generating elements are arranged, as shown in Fig. 14(c), so long as no vibration is applied, the ceiling plate 2012 remains stationary due to a static frictional force which acts between the ceiling plate and the substrate by the component F'1 in the direction (Z direction) perpendicular to the substrate. However, when vibrations are applied to the ceiling plate 2012 and the substrate 2011 in the manner described above, the frictional force by the component F'1 varies, and the ceiling plate 2012 moves relative to the substrate 2011 in X direction, i.e., in a direction indicated by an arrow in Fig. 14(c), by the component F'2.

Accordingly, the walls 2012a of the ceiling plate 2012 enter the recessed portions 2011d between the energy generating elements. When the ceiling plate 2012 moves, it may move throughout the gap between the recessed portion and the wall 2012a. However, the wall 2012a does not rise on the subsequent energy generating element, because the amplitude of vibrations is smaller than the depth of the recessed portion.

Although the time during which vibrations are applied differs depending on the conditions including the amplitude and frequency of vibrations and the position and elastic force of the spring 2103, it is about 1 second in this
5 embodiment. The vibration application time can be made longer than this time because the ceiling plate and the substrate do not shift after seating even if the ceiling plate is vibrated excessively.

When alignment between the energy generating elements
10 and the discharge ports (the ink flow passages) is completed, application of the vibrations is suspended, and the ceiling plate 2012 and the substrate 2011 are fixed to each other using an adhesive or a presser bar plate.

In the above embodiment, the ceiling plate arranged on
15 a tray is picked up and placed on the substrate by means of the automatic manipulator. In the case of an ink jet head in which nozzles are arrayed at a high density, a deviation of the ceiling plate placed on the substrate in X direction may reach a pitch of the discharge ports (50 through 100
20 μm) due to a deterioration in the accuracy of the external shape of the ceiling plate or a deviation of the position of the ceiling plate on the tray. In that case, the energy generating elements may be misaligned with the discharge ports (the ink flow passages) by about \pm a pitch of the
25 discharge ports.

Hence, after the ceiling plate has been supplied by the automatic manipulator, an inner wall 2012b of the ceiling plate 2012 is brought into abutment with a side surface 2011c of the substrate 2011 by pressing the side surface of the ceiling plate by a mechanism (not shown), as shown in Fig. 14(a). The positional accuracy between the inner wall 2012b of the ceiling plate 2012 and the discharge port formed in the ceiling plate is about several μm or less because the same spacer is employed in the mold.

10 The positional accuracy between the side surface 2011c of the substrate 2011 and the energy generating element is determined by the cutting accuracy with which the substrate is cut out from a wafer, and is about 10 μm . Therefore, when the inner wall 2012b of the ceiling plate is brought

15 into abutment with the side surface 2011c of the substrate, the ceiling plate can be placed on the substrate with an accuracy of 20 to 30 μm , and alignment can thus be performed while maintaining a predetermined relation between the energy generating elements and the discharge

20 ports (the ink flow passages).

Alternatively, as shown in Figs. 15(A) and 15(B), alignment between the energy generating elements and the nozzles may be performed simply by providing a convex portion on an end portion 2122 of the plurality of energy

25 generating elements on the substrate and by bringing a

dummy nozzle wall portion 2134 formed on the ceiling plate into abutment with the convex portion. In this case, the convex portion (pattern) is basically formed on the substrate such that it can abut against the dummy nozzle wall 2134 formed at the end of the nozzle row in the ceiling plate. The convex pattern may be manufactured by forming and patterning a protective film, energy generating elements, interconnections, a protective film and a cavitation resistant film on the substrate. Alternatively, the convex pattern may be formed in a separate process. The pattern has a shoulder of 1 μm preferably, with more preferable shoulder being 5 μm or above. Although the pattern may also be formed by means of, for example, screen printing, the most preferable method is the photolithographic process because the photolithographic process assures a high degree of accuracy and an excellent rectangular cross-section.

In the ceiling plate, since the dummy nozzle portion can be formed at the same high accuracy as that of the nozzle pitch, the energy generating elements can be aligned with the ink discharge ports at a high degree of accuracy by bringing the nozzle wall 2134 into abutment with the convex portion 2122 formed on the substrate. Fig. 15 illustrates the positional relation between the convex abutment pattern and the ceiling plate dummy nozzle wall.

Fig. 15(a) illustrates the positional relation between the substrate 2011 and the ceiling plate, obtained when the ceiling plate is just placed on the substrate. In the state shown in Fig. 15(a), the energy generating elements 2011 formed on the substrate are not in alignment with the ink discharge ports 2120 formed in the ceiling plate. The side wall of the convex portion 2122 formed on the substrate is brought into abutment with a side wall 2134 of the ceiling plate dummy nozzle by moving the ceiling plate sideways, as shown in Fig. 15(b), and the energy generating elements can thus be brought into alignment with the ink discharge ports. Nozzle walls of dummy nozzles 2133 which are not used for abutment are dimensioned such that they do not make contact with the convex pattern.

The convex abutment pattern may be formed on the substrate when any of or a plurality of a heat storage layer, an energy generating element layer, an interconnection layer, a protective film layer and a cavitation resistant layer are patterned. In this case, the convex abutment pattern can be formed without increasing production cost. In the formation of the convex pattern by the above method, alignment accuracy between the respective layers and the process conditions required to reduce the taper of the cross-section must be made adequate.

The convex portion 2122 may also be formed by a separate process. A pattern coating method, such as screen printing, may be employed as the pattern forming method. Alternatively, a metal film separately formed on the

5 cavitation resistant layer may be patterned by the photolithographic process. The most desirable pattern forming method is the method of forming the pattern using a photosensitive resin. Examples of the photosensitive resin are a positive type photoresist which is a mixture of a

10 novolak resin and naphthoquinone diazido derivative, a negative type photoresist composed of an acrylic resin having an unsaturated double bond and a photosensitive agent, a negative type resist composed of a rubber resin and a diazido compound, a negative type resist which is a

15 mixture of an epoxy resin and onium salt and a silicone type resist.

Among the above-mentioned photosensitive resins, a resist composed of an epoxy resin and onium salt and a silicone type resist are the most desirable because they

20 exhibit high alkali ink resistance.

More preferably, the pattern is formed by forming a resin layer made of polysulfone or polyether sulfone exhibiting high ink resistance, by patterning a silicone type resist on the resin layer and then by patterning the

25 resin layer by oxygen plasma using the resist as a mask.

In this method, an excellent pattern can be formed using a material exhibiting high ink resistance.

The present invention offers an excellent effect when it is applied to an ink jet recording method, particularly,
5 an ink jet recording head or apparatus of the type which is provided with means (e.g., electro-thermal transducers or a laser beam) for generating heat energy as the energy utilized to discharge ink and which is designed to cause changes in the state of the ink by the heat energy, because
10 such an ink jet recording process assures high density and high definition of recording.

Preferable configurations and principles of such ink jet heads or apparatuses are described in, for example, U.S. Patent Nos. 4,723,129 and 4,740,796. Although this
15 ink jet process can be applied to both on-demand type and continuous type, it is preferable for it to be applied to the on-demand type devices. In the on-demand type recording head, at least one driving signal for generating a rapid increase in the ink temperature to a value
20 exceeding the nucleate boiling temperature of ink is applied in response to recording information to each of the electro-thermal transducers, which are disposed in such a manner that they respectively correspond to the ink holding sheets or flow passages, so as to generate thermal energy
25 and thereby cause film boiling to occur on the heat acting

surface of the ink jet head. Bubbles are thereby formed in the liquid (ink) in one-to-one correspondence with the driving signals applied to the electro-thermal transducers. The ink is ejected from the discharge outlet by virtue of
5 the growth and contraction of the bubble to form at least one droplet. At that time, the use of a driving signal having a pulse-like form is preferred because the pulse-like driving signal causes the bubble to grow and contract instantaneously and adequately, and ink can therefore be
10 ejected in excellent response. Driving of the recording head by means of a pulse-like signal has been proposed in, for example, U.S. Patent Nos. 4,463,359 and 4,345,262. If the conditions described in U.S. Patent No. 4,313,124, which involves an increase in the temperature of the heat
15 acting surface of the ink jet head, are adopted, even better recording is possible.

The present invention can be applied to an ink jet head of the type in which the discharge ports, the liquid passages (linear or bent) and the electro-thermal
20 transducers are provided in one-to-one-correspondence, like those disclosed in the aforementioned references. The present invention can also be applied to a recording head in which the heat acting surface is disposed in a bent area, like those disclosed in U.S. Patent Nos. 4,558,333
25 and 4,459,600.

The application of the present invention to a full-line type ink jet head is particularly effective, because in the full-line type ink jet head the discharge ports are arranged over a length corresponding to the maximum width of the recording medium on which the ink jet apparatus can record and hence the influence of the aforementioned heat expansion can thus be reduced. Such a recording head may be constructed by combining a plurality of ink jet heads to fulfil the length corresponding to the maximum recording medium width or as a single ink jet head unit.

The serial type recording head to which the present invention can be applied may be of the type which is fixed to the apparatus body, of the chip type which is replaceable and which accomplishes electrical and ink supply connections to the apparatus body by the mounting thereof on the apparatus body, or of the cartridge type in which an ink tank is integrally formed with the ink jet head.

Preferably, ink jet head discharge recovery means and auxiliary means may be incorporated in the ink jet apparatus according to the present invention for the purpose of ensuring more stable recording. Suitable examples of such means include a capping means, a cleaning means, a pressurizing or suction means for the ink jet head, a preliminary heating means which employs the

electro-thermal transducers, other heating elements or a combination of the electro-thermal transducers and other heating elements, and a preliminary discharge means for performing discharge for purposes other than recording an
5 image.

The above-described ink jet apparatus according to the present invention may be of the type which incorporates a single ink jet head corresponding to a single ink color or of the type which incorporates a plurality of ink jet heads
10 respectively corresponding to a plurality of different recording colors or densities. That is, the present invention can also be applied not only to an ink jet apparatus having a single recording mode in which recording is performed in only a single major color, such as black,
15 and but also to an apparatus having at least one recording mode selected from both a recording mode in which recording is performed in a plurality of different colors and a recording mode in which recording is performed in a full color obtained by mixing colors. In the latter apparatus,
20 the ink jet head may be constructed as a single unit or by combining a plurality of ink jet heads.

In the above-described embodiments, the ink has been described as liquid ink. However, an ink which is in solid form at or below room temperature and which softens or is
25 liquid at room temperatures, may also be used.

Alternatively, an ink which becomes in liquid form when a recording signal is applied may also be used because control of the temperature of the liquid used in the ink jet process generally ranges from 30°C to 70°C so as to
5 adjust the viscosity of the ink to a predetermined range which ensures stable ejection. A solid ink which is normally in a solid form and liquefied by heating may also be used for the purpose of preventing an increase in the temperature by virtue of heat energy by utilizing the heat
10 energy as an energy required to change the condition of the ink from a liquid form to a solid form or of preventing evaporation of the ink. In any way, an ink which is liquified by the presence of thermal energy, such as that which is liquefied in response to a recording signal and is
15 ejected in the form of liquid ink or that which is liquefied in response to a recording signal but starts solidifying when it reaches the recording medium, may also be used.

The present invention can also be applied to an ink
20 jet apparatus which is used as an image output terminal for the information processing equipment, such as a computer, a copying machine combined with, for example, a reader, or a facsimile apparatus having a transmission/reception function.

25 The present invention can also be applied to a textile

printing machine designed to perform recording (printing)
by discharging ink onto a cloth using the ink jet head
according to the present invention.

WHAT IS CLAIMED IS:

1. An ink jet head comprising:

a substrate having a plurality of energy generating
5 elements for generating energy utilized to discharge an ink
provided thereon, said substrate having a recessed portion;
and

a wall member joined to said substrate, said wall
member having a plurality of flow passage walls which
10 partially define a plurality of flow passages, the energy
generated by said energy generating elements acting through
said flow passages so as to act on the ink to discharge the
ink, said flow passages being fully-defined when said
substrate is joined to said wall member,

15 wherein said recessed portion of said substrate is
provided between adjoining said energy generating elements,
said recessed portion having a bottom surface located at a
position which is lower than a position of a heat acting
surface of said substrate along which heat is transmitted
20 to the ink, said flow passage walls of said wall member
abutting said substrate at said bottom surface.

2. The ink jet head according to claim 1, wherein said
ink jet head is of a full line type in which a plurality of
discharge ports for discharging the ink are disposed over
25 an entire recordable area of a recording medium.

3. The ink jet head according to one of claims 1 or 2,
said energy generating element comprising an electro-
thermal transducer which causes the heat energy to act on
the ink to generate a bubble so that the ink is discharged
5 as a result of growth of the bubble.

4. The ink jet head according to claim 1, wherein a
raised convex pattern of material is provided on a surface
of said substrate at an end portion thereof in a direction
in which said plurality of energy generating elements are
10 arranged, and wherein said wall member has a recessed
portion corresponding to said convex pattern.

5. The ink jet head according to claim 4, wherein said
recessed portion of said wall member is provided within a
dummy nozzle portion.

15 6. The ink jet head according to claim 4, wherein said
convex pattern is made of at least one of an epoxy and a
silicone type photosensitive material.

7. A method of manufacturing an ink jet head having a
substrate having a plurality of energy generating elements
20 for generating energy utilized to discharge ink provided
thereon, said substrate having a recessed portion, and a
wall member joined to said substrate, said wall member
having a plurality of flow passage walls which partially
define a plurality of flow passages, the energy generated
25 by said energy generating elements acting through said flow

passages so as to act on the ink to discharge the ink, said flow passages being fully-defined when said substrate is joined to said wall member, said method comprising the steps of:

- 5 providing a plurality of recessed portions in said substrate;

 fitting said recessed portions to said flow passage walls of said wall member by applying a force to said wall member along a direction in which said plurality of energy
10 generating elements are arranged, thereby aligning said flow passages with said energy generating elements.

8. The method of manufacturing an ink jet head according to claim 7, further comprising the steps of:

 providing a raised convex pattern of material on a
15 surface of said substrate at an end portion thereof in a direction in which said plurality of energy generating elements are arranged, and wherein said wall member has a recessed portion corresponding to said convex pattern.

9. The method of manufacturing an ink jet head according
20 to claim 8, wherein said recessed portion of said wall member is provided within a dummy nozzle portion.

10. The method of manufacturing an ink jet head according to claim 7, wherein said convex pattern is made at least one of an epoxy and a silicone type photosensitive
25 material.

11. A method of manufacturing an ink jet head having a substrate having a plurality of energy generating elements for generating energy utilized for discharging an ink provided thereon, said substrate having a recessed portion,
5 and a wall member joined to said substrate and having a plurality of flow passage walls which partially define a plurality of flow passages, the energy generated by said energy generating elements acting through said flow passages so as to act on the ink to discharge the ink, said
10 flow passages being fully-defined when said substrate is joined to said wall member, said method comprising the steps of:

providing a plurality of recessed portions in said substrate;
15 fitting said recessed portions to said flow passage walls of said wall member by vibrating said substrate so that a force having at least a component acting in a direction in which said plurality of energy generating elements are arranged is applied to said wall member,
20 thereby aligning said flow passages with said energy generating elements.

12. The method of manufacturing an ink jet head according to claim 11, further comprising the steps of:

providing a raised convex pattern of material on a
25 surface of said substrate at an end portion thereof in a

direction in which said plurality of energy generating elements are arranged, and wherein said wall member has a recessed portion corresponding to said convex pattern.

13. The method of manufacturing an ink jet head according
5 to claim 12, wherein said recessed portion of said wall member is provided within a dummy nozzle portion.

14. The method of manufacturing an ink jet head according to claim 11, wherein said convex pattern is made at least one of an epoxy and a silicone type photosensitive
10 material.

15. The method of manufacturing an ink jet head according to claim 11, wherein said substrate is vibrated by vibrations having an amplitude which is smaller than a width of said recessed portion formed in said substrate.

16. An apparatus for manufacturing an ink jet head having
15 a substrate having a plurality of energy generating elements for generating energy utilized to discharge an ink provided thereon, said substrate having a recessed portion, and a wall member joined to said substrate and having a
20 plurality of flow passage walls which partially define a plurality of flow passages, the energy generated by said energy generating elements acting through said flow passages so as to act on the ink to discharge the ink, said recessed portion is fitted to each of said flow passage
25 walls formed in said substrate so that said flow passages

are defined when said flow passage walls engage said recessed portions, said apparatus comprising:

retaining means for retaining said substrate in which said recessed portions are provided;

5 placing means for placing said wall member on said substrate retained by said retaining means in such a manner that said recessed portions oppose said flow passage walls;

pressing means for pressing said wall member with a force having at least a force component in a direction in
10 which said plurality of energy generating elements are arranged, said wall member having been placed by said placing means in a state wherein said wall member is stacked on said substrate; and

vibration means for vibrating said substrate so that
15 the force component acts in the direction.

17. The apparatus for manufacturing an ink jet head according to claim 16, wherein said substrate is vibrated by vibrations having an amplitude which is smaller than a width of said recessed portion formed in said substrate.

20 18. An ink jet apparatus comprising:

an ink jet head having a substrate having a plurality of energy generating elements for generating energy utilized to discharge an ink provided thereon, said substrate having a recessed portion, and a wall member
25 joined to said substrate, said wall member having a

plurality of flow passage walls which partially define a plurality of flow passages, the energy generated by said energy generating elements acting through said flow passages so as to act on the ink to discharge the ink, said
5 flow passages being defined when said substrate engages said wall member; and

driving signal generation means for generating signals for driving said energy generating elements of said ink jet head,

10 wherein said recessed portion has a bottom surface located at a position which is lower than a position of a heat acting surface of said substrate along which heat is transmitted to the ink, said flow passage walls of said wall member abutting said substrate at said bottom
15 surfaces.

ABSTRACT OF THE DISCLOSURE

An ink jet head includes a substrate on which a plurality of energy generating elements for generating energy utilized to discharge ink are provided, and a wall member joined to the substrate. The wall member has a plurality of flow passage walls which partially define flow passages, and the energy generated by the energy generating element acts through the flow passage so as to act on the ink to discharge the ink. The flow passages are fully defined when the substrate is joined to the wall member. A recessed portion provided in the substrate of the ink jet head is positioned between adjoining energy generating elements. The recessed portion has a bottom surface located at a position which is lower than a position for a heat acting surface of the substrate along which heat is transmitted to the ink. The flow passage walls of the wall member abut the substrate at the bottom surface. Consequently, any pressure wave generated by the energy generating element is not released to an adjacent flow passage, and crosstalk between the adjoining flow passages can be prevented. As a result, an ink jet head exhibiting excellent printing quality can be provided.

FIG. 1

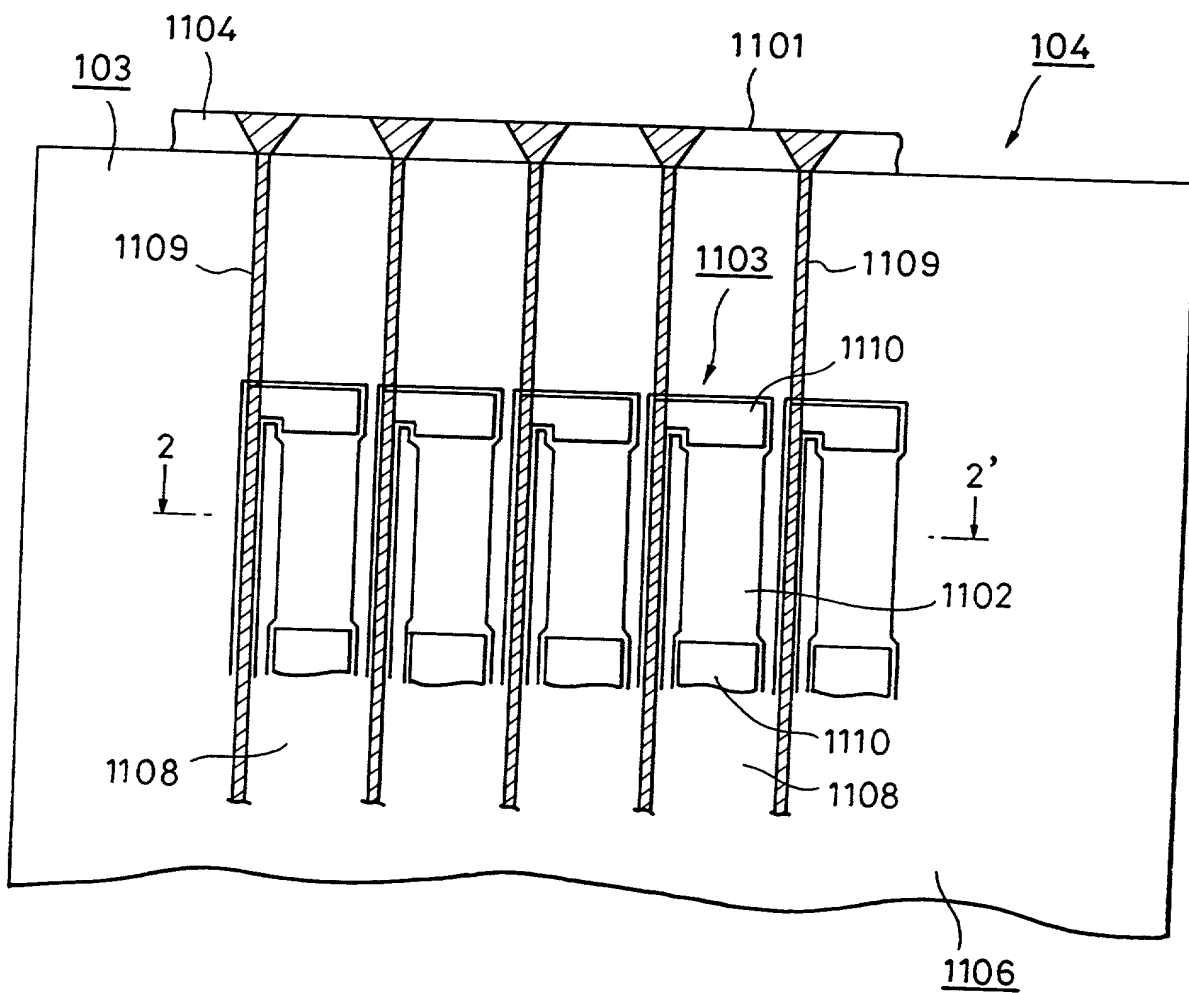


FIG. 2

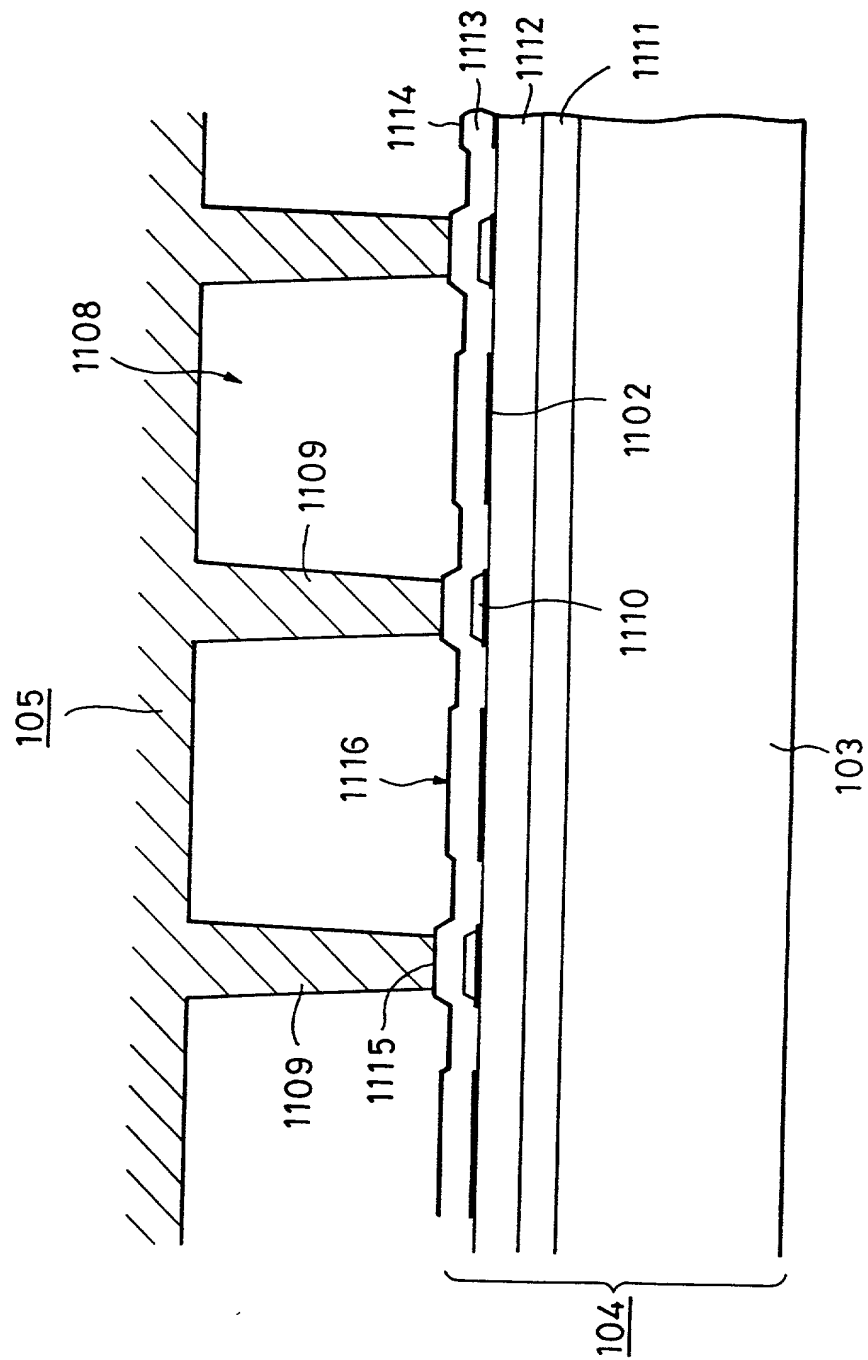


FIG. 3

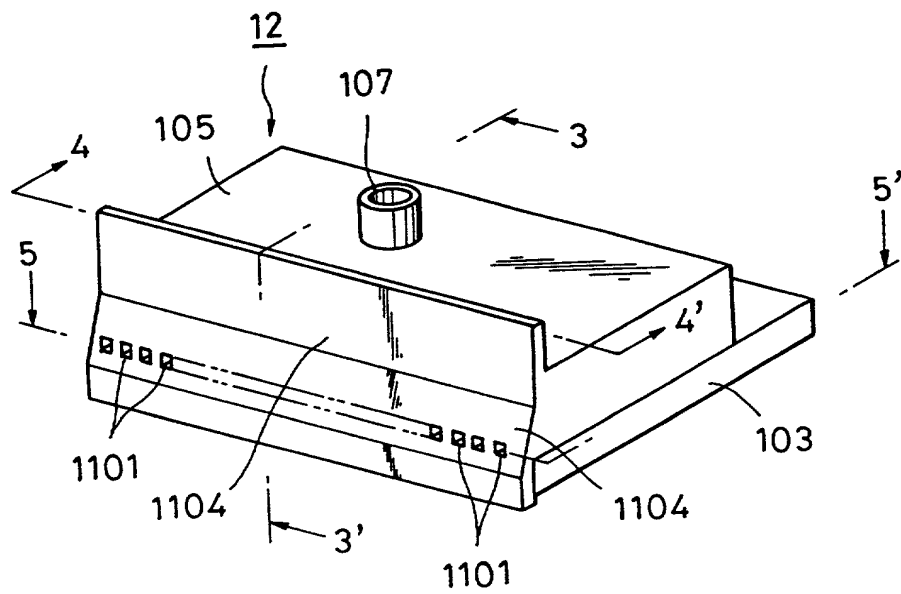


FIG. 4

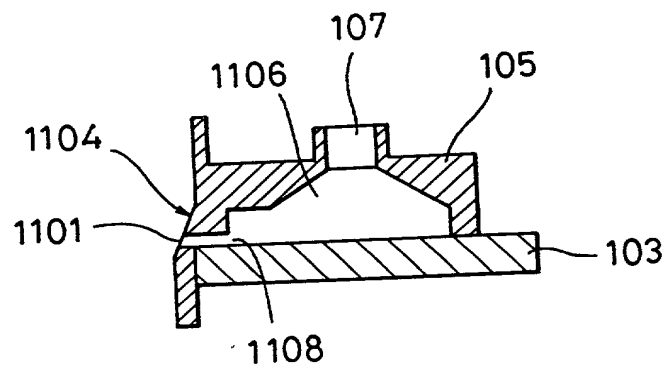


FIG. 5



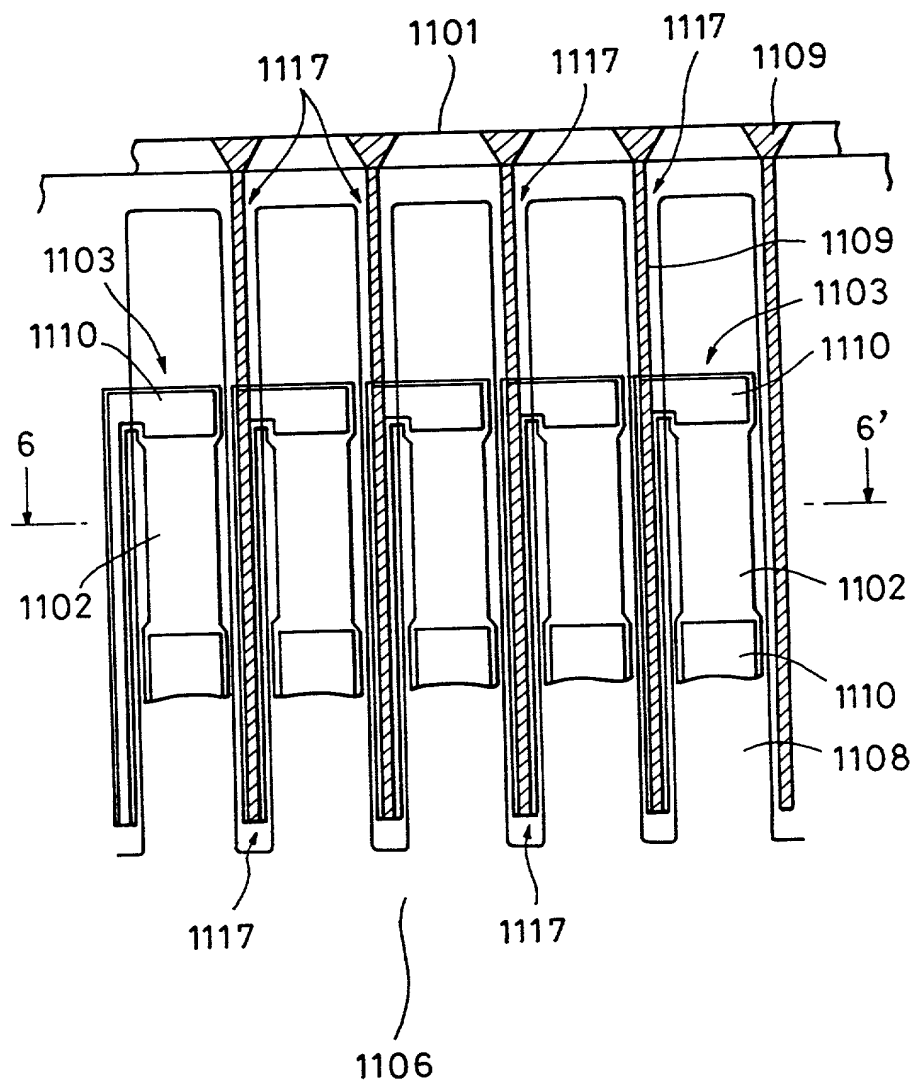


FIG. 6

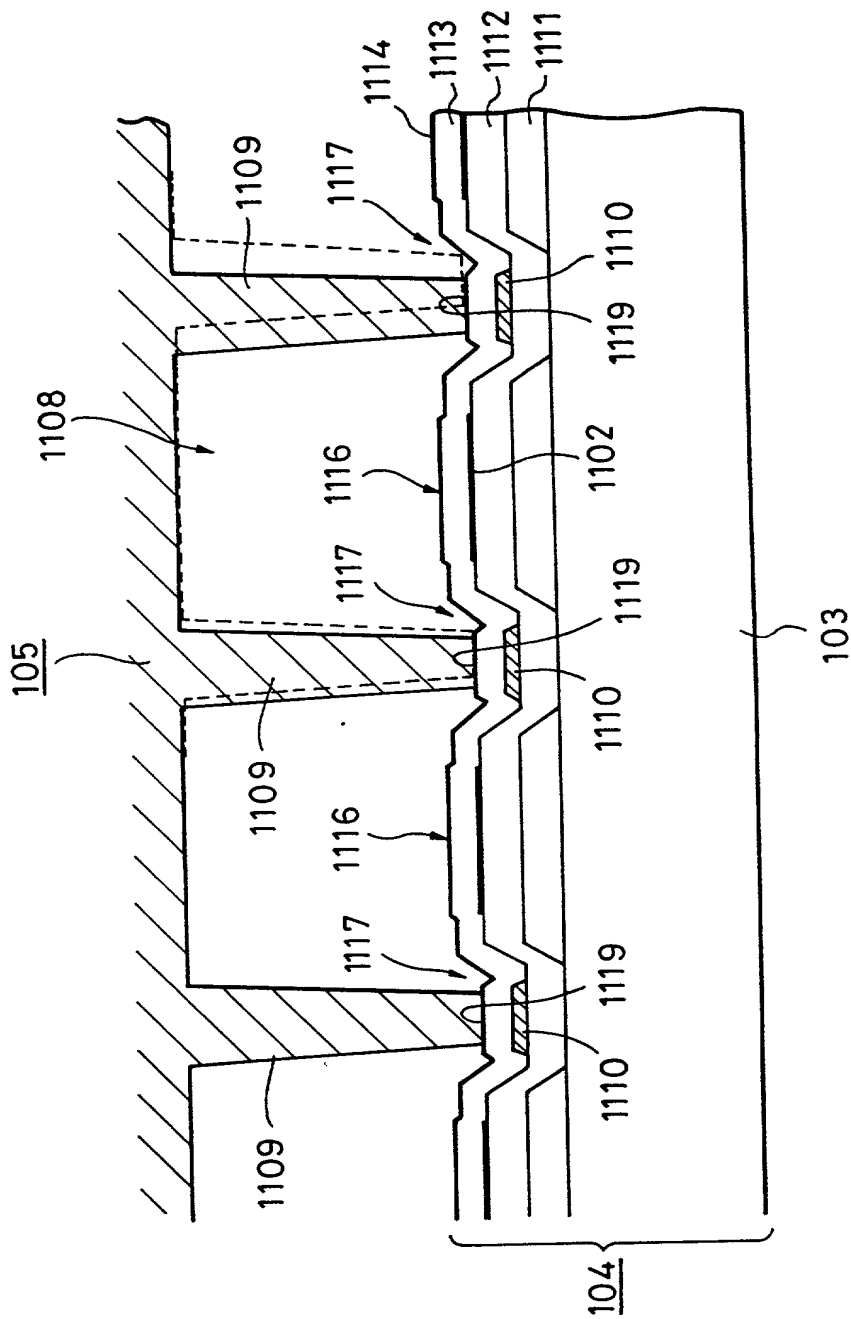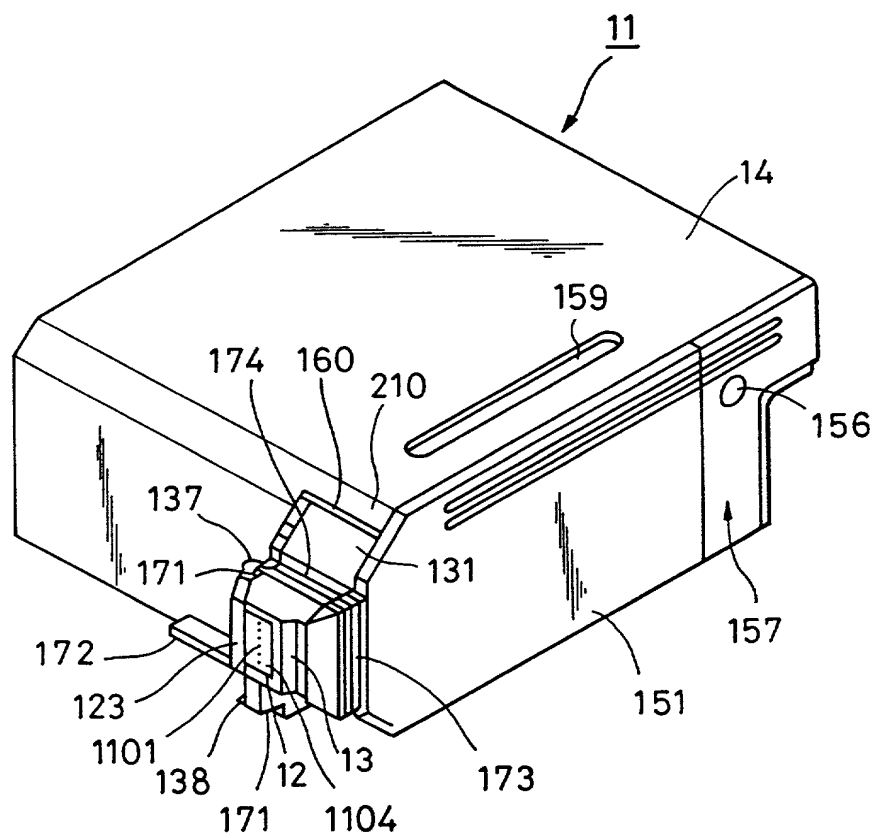

[illegible]

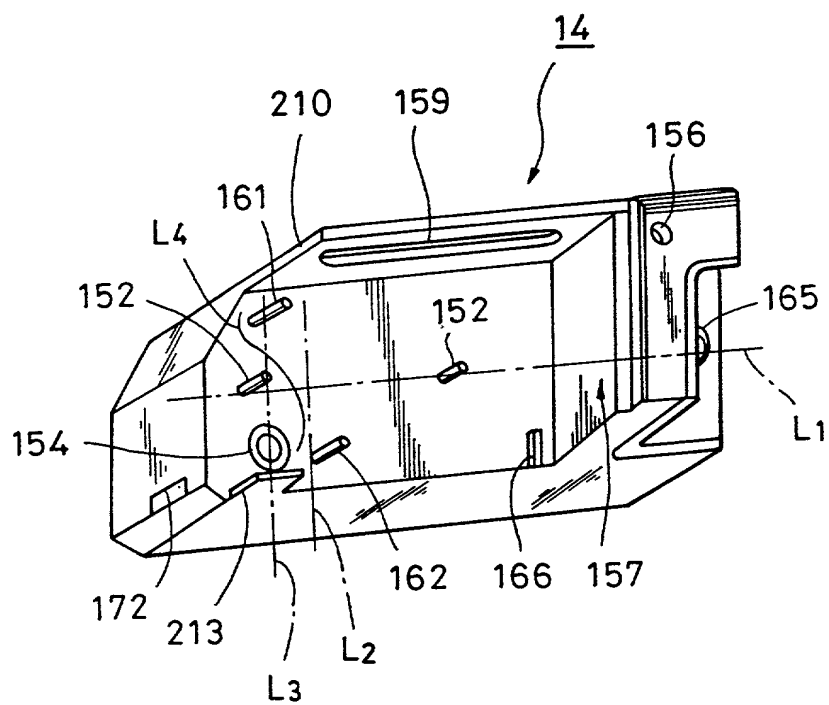
[illegible]

FIG. 10

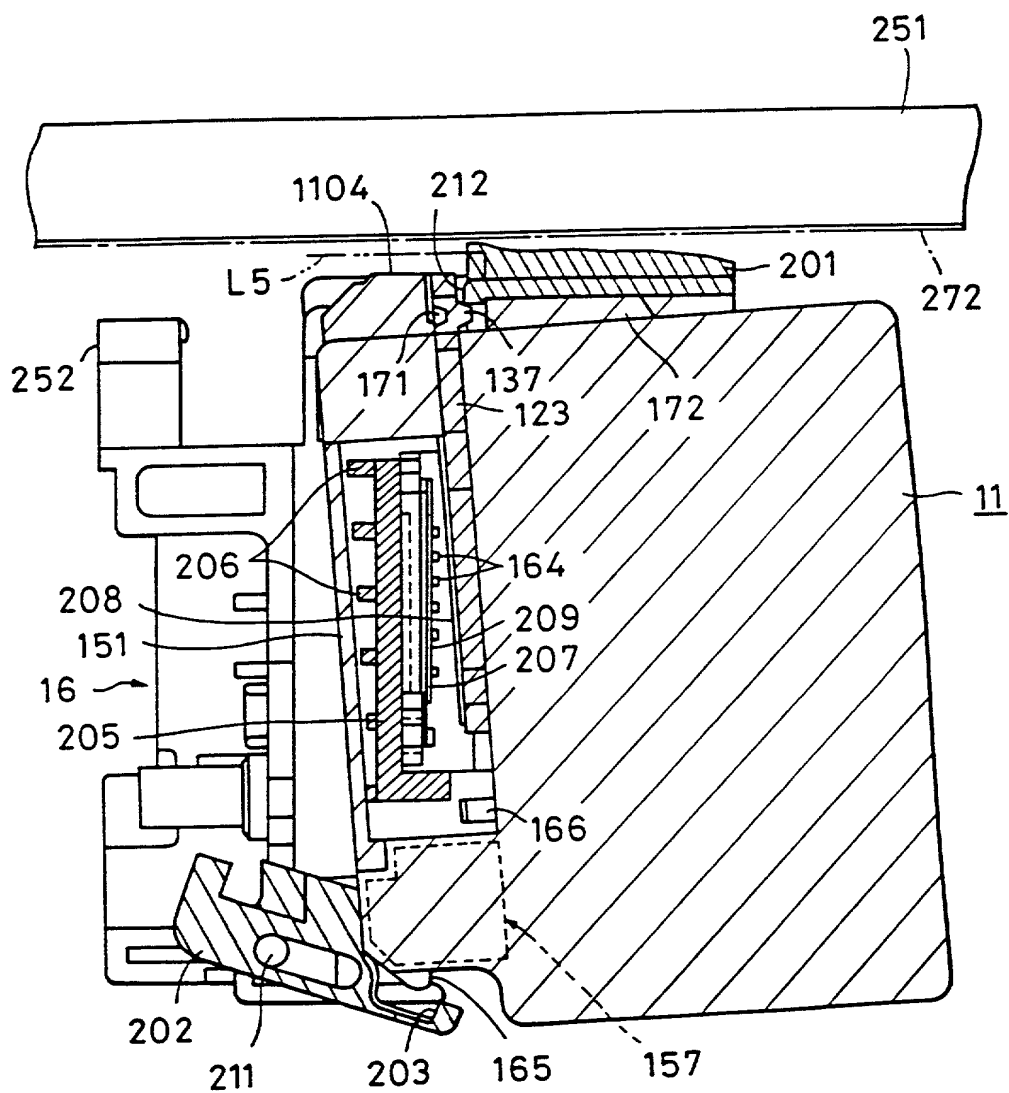


FIG. II

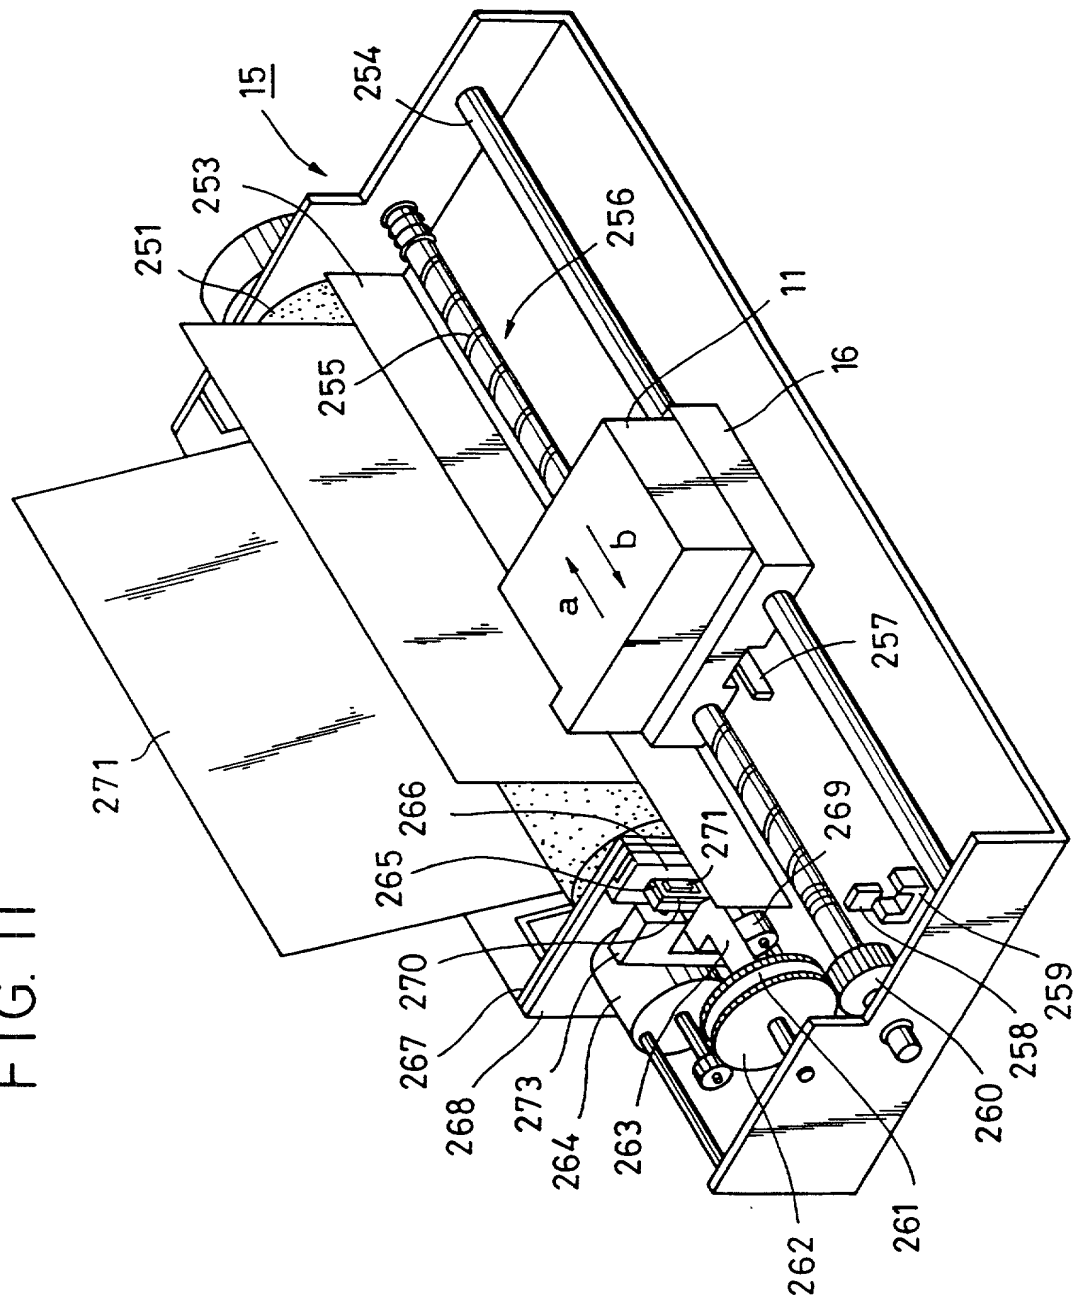


FIG. 12(A)

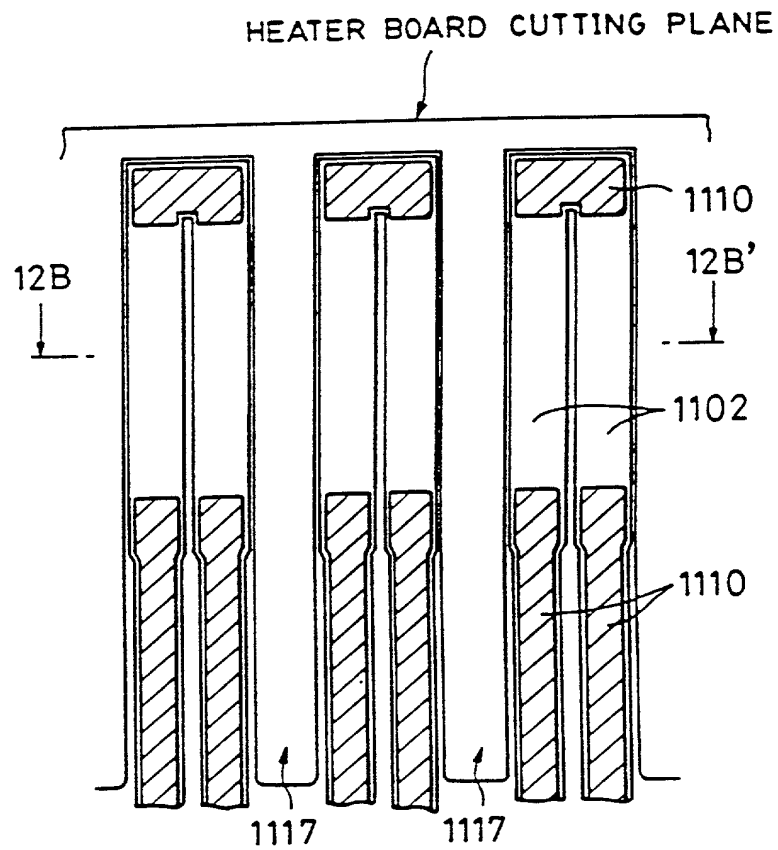


FIG. 12(B)


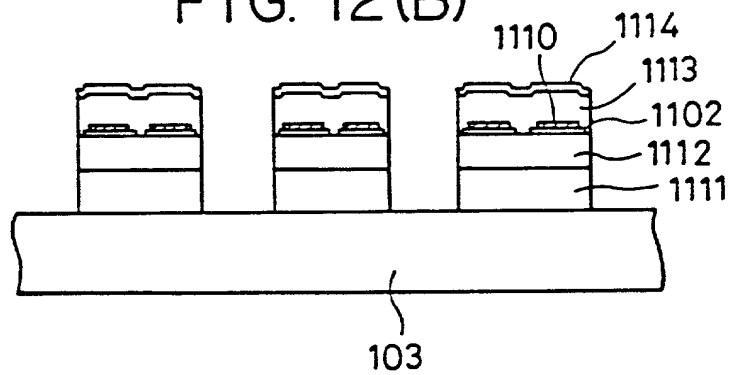


FIG. 13

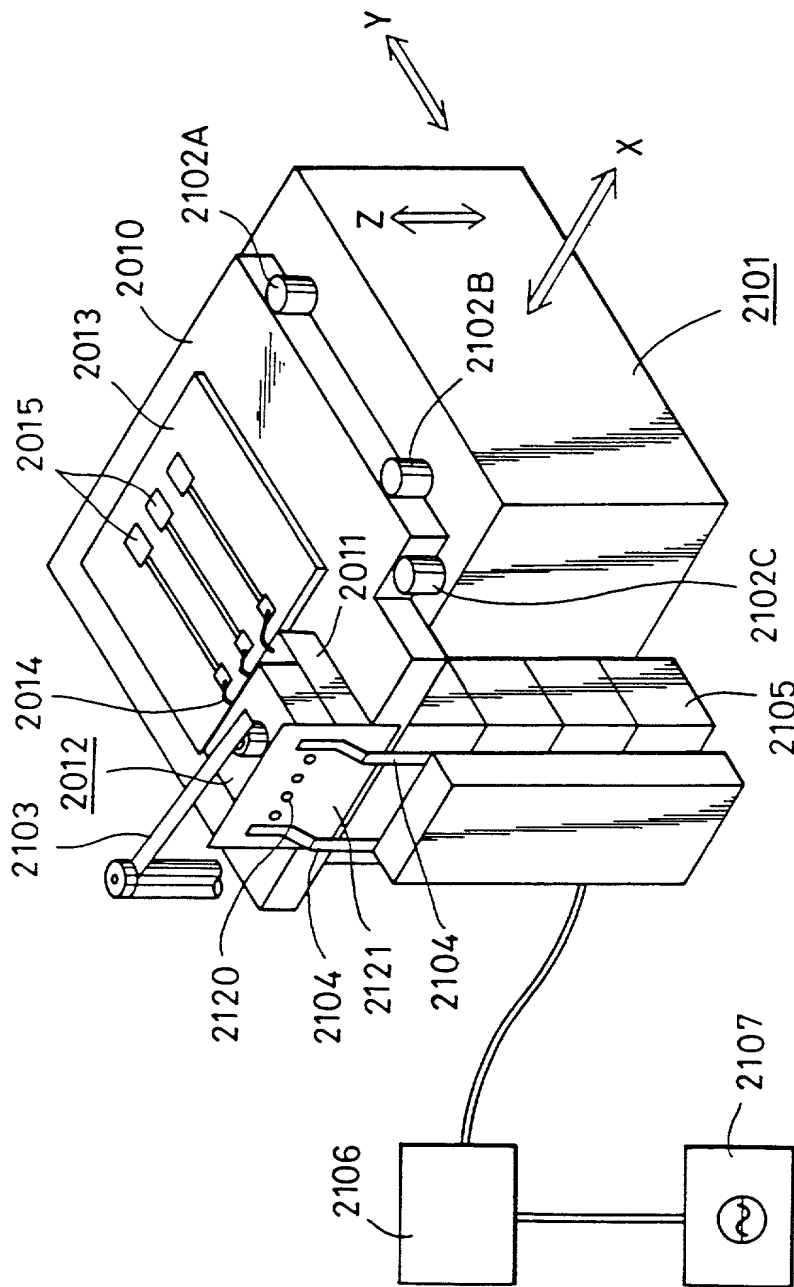




[illegible][illegible][illegible]

FIG. 15(A)


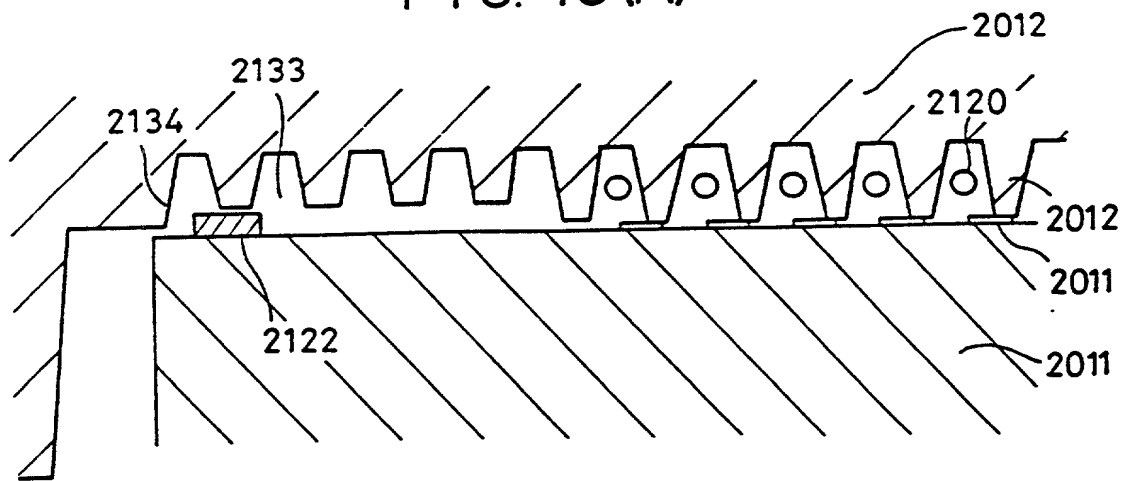


FIG. 15(B)

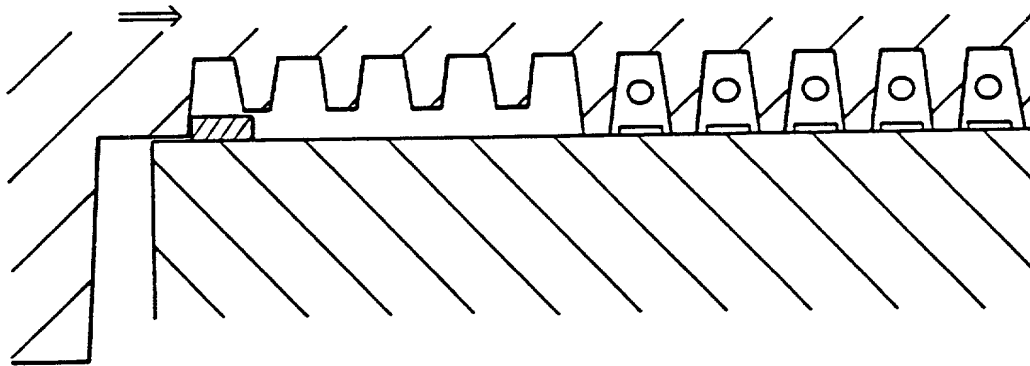

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

CFG 1250 US

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled INK JET HEAD, INK JET APPARATUS, AND METHOD OF AND APPARATUS FOR MANUFACTURING THE HEAD

the specification of which ☒ is attached hereto. ☐ was filed on _____ as Application Serial No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign applications for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	(Yes/No) Priority Claimed
Japan	188354/1993 (Pat.)	29/July/1993	Yes
Japan	188356/1993 (Pat.)	29/July/1993	Yes
Japan	169791/1994 (Pat.)	21/July/1994	Yes

I hereby appoint Joseph M. Fitzpatrick (Registration No. 17,398), Lawrence F. Scinto (Registration No. 18,973), William J. Brunet (Registration No. 20,452), Robert L. Baechtold (Registration No. 20,860), John A. O'Brien (Registration No. 24,367), John A. Krause (Registration No. 24,613), Henry J. Renk (Registration No. 25,499), Peter Saxon (Registration No. 24,947), Anthony M. Zupcic (Registration No. 27,276), Charles P. Baker (Registration No. 26,702), Stevan J. Bosses (Registration No. 22,291), Edward E. Vassallo (Registration No. 29,117), Ronald A. Clayton (Registration No. 26,718), Lawrence A. Stahl (Registration No. 30,110), Laura A. Bauer (Registration No. 29,767), Leonard P. Diana (Registration No. 29,296), David M. Quinlan (Registration No. 26,641), Nicholas N. Kallas (Registration No. 31,530), William M. Wannisky (Registration No. 28,373), Lawrence Alaburda (Registration No. 31,583), Lawrence S. Perry (Registration No. 31,865), Robert H. Fischer (Registration No. 30,051), Christopher Philip Wrist (Registration No. 32,078), Gary M. Jacobs (Registration No. 28,861), Michael K. O'Neill (Registration No. 32,622), Bruce C. Haas (Registration No. 32,734), Scott K. Reed (Registration No. 32,433), Scott D. Malpede (Registration No. 32,533), John A. Mitchell (Registration No. 19,032), Fredrick M. Zullo (Registration No. 32,452), Richard P. Bauer (Registration No. 31,588), Warren E. Olsen (Registration No. 27,290), Abigail P. Cousins (Registration No. 29,292), Jennifer A. Tegfeldt (Registration No. 31,310), Steven E. Warner (Registration No. 33,326), Thomas J. O'Connell (Registration No. 33,202), Aaron C. Deditch (Registration No. 33,865), Penina Wollman (Registration No. 30,816), David L. Schaeffer (Registration No. 32,716), Jack S. Cubert (Registration No. 24,245), Mark A. Williamson (Registration No. 33,628), John T. Whelan (Registration No. 32,448), Patricia M. Drost (Registration No. 29,790), Jean K. Dudek (Registration No. 30,938), Raymond R. Mandra (Registration No. 34,382), Dominick A. Condo (Registration No. 33,856), Steven C. Bauman (Registration No. 33,832), Pasquale A. Razzano (Reg. No. 25,512), John W. Behringer (Registration No. 23,086), Robert C. Kline (Registration No. 17,739), Richard F. Jaworski (Registration No. 33,515), Lawrence W. Nelson (Registration No. 34,684), Benjamin C. Hsing (Registration No. 34,528), Leo J. Jennings (Registration No. 32,902), Mark J. Itri (Registration No. 36,171), William C. Hwang (Registration No. 36,169) and John C. Phillips (Registration No. 35,322), my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Address all correspondence to:

FITZPATRICK, CELLA, HARPER & SCINTO
277 Park Avenue
New York, N.Y. 10172
Telephone No. (212) 758-2400

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

(Page 2)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor Hiroshi Sugitani
 Inventor's signature Hiroshi Sugitani
 Date July 21, 1994 Citizen/Subject of Japan
 Residence Machida-shi, Japan

Post Office Address c/o CANON KABUSHIKI KAISHA
3-30-2, Shimomaruko, Ohta-ku, Tokyo, Japan

Full Name of Second Joint Inventor, if any Masami Kasamoto
 Second Inventor's signature Masami Kasamoto
 Date July 21, 1994 Citizen/Subject of Japan
 Residence Ayase-shi, Japan

Post Office Address c/o CANON KABUSHIKI KAISHA
3-30-2, Shimomaruko, Ohta-ku, Tokyo, Japan

Full Name of Third Joint Inventor, if any Tsuyoshi Orikasa
 Third Inventor's signature Tsuyoshi Orikasa
 Date July 21, 1994 Citizen/Subject of Japan
 Residence Musashimurayama-shi, Japan

Post Office Address c/o CANON KABUSHIKI KAISHA
3-30-2, Shimomaruko, Ohta-ku, Tokyo, Japan

Full Name of Fourth Joint Inventor, if any Masashi Miyagawa
 Fourth Inventor's signature Masashi Miyagawa
 Date July 21, 1994 Citizen/Subject of Japan
 Residence Yokohama-shi, Japan

Post Office Address c/o CANON KABUSHIKI KAISHA
3-30-2, Shimomaruko, Ohta-ku, Tokyo, Japan

68222 "E" 23333

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

(Page 3)

Full Name of Fifth Joint Inventor, if any Jun Kawai
Fifth Inventor's signature Jun Kawai
Date July 21, 1994 Citizen/Subject of Japan
Residence Tokyo, Japan

Post Office Address c/o CANON KABUSHIKI KAISHA
3-30-2, Shimomaruko, Ohta-ku, Tokyo, Japan

Full Name of Sixth Joint Inventor, if any Teruo Arashima
Sixth Inventor's signature Teruo Arashima
Date July 21, 1994 Citizen/Subject of Japan
Residence Kawasaki-shi, Japan

Post Office Address c/o CANON KABUSHIKI KAISHA
3-30-2, Shimomaruko, Ohta-ku, Tokyo, Japan

Full Name of Seventh Joint Inventor, if any Masaaki Izumida
Seventh Inventor's signature Masaaki Izumida
Date July 21, 1994 Citizen/Subject of Japan
Residence Kawasaki-shi, Japan

Post Office Address c/o CANON KABUSHIKI KAISHA
3-30-2, Shimomaruko, Ohta-ku, Tokyo, Japan

Full Name of Eighth Joint Inventor, if any _____
Eighth Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____

Post Office Address _____

Full Name of Ninth Joint Inventor, if any _____
Ninth Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____

Post Office Address _____